

Berker K.1/K.5

Profiled, contoured, sleek: the Berker K.1 and its sister programme, Berker K.5, are perfect examples for straight designs. It gets better: the Berker K.5 is now also available in fully-anodised aluminium, as well as in its classic stainless steel variant.

Berker K.1

- High breaking resistance and long life
- Available in glossy polar white or matt anthracite
- Multiple frames vertical or horizontal for up to five devices

Berker K.5

- High-quality stainless steel combined with classic design
- Unique combination of clear contours and matt-shiny surface
- New: also available in fully-anodised aluminium (according to E6EV1)



DESIGN PLUS



Frames / Covers / Central inserts

Plastic, glossy
polar white similar to RAL 9010
red similar to RAL 3003
green similar to RAL 6029
orange similar to RAL 2003
yellow similar to RAL 1004


Plastic, matt lacquered
anthracite similar to RAL 7021

Metal, matt finish
stainless steel

Metal, anodised
aluminium (according to E6EV1)

Individual items that cannot be coated
for technical reasons are lacquered.

Schuko socket outlets	358
International socket outlet systems	365
Covers for switches/push-buttons	369
Timers	372
Covers for dimmers	373
BLC – Berker Light Control	374
Covers for blind switches/push-buttons	376
RolloTec	378
HAVAC controllers and covers	380
Communication/multimedia technology	383
Consumer electronics	388
Covers for pilot lamps	389
Supplementary products	390
Hotel applications	392
Barrier-free construction	393
Hospital installation	394
Frames	400
Surface-mounted housings	402

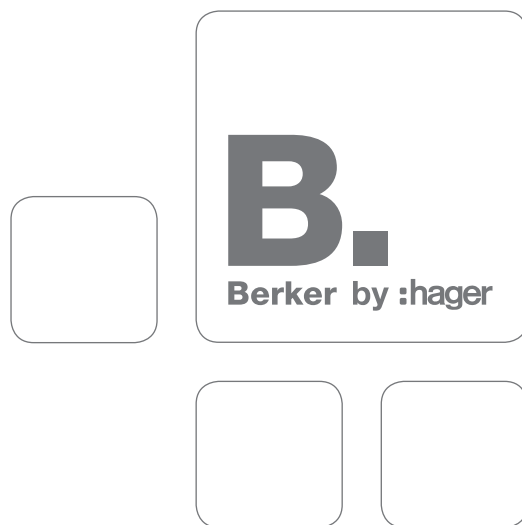

SCHUKO socket outlets

- Socket outlets with enhanced contact protection (child protection) according to IEC 60884-1
- Connection terminals according to IEC 60884-1

New



SCHUKO socket outlet

i 853

Rated voltage 250 V~ - with plug-in terminals
Rated current 16 A

Design	Order no.	PU
polar white glossy	4715 70 09	10
anthracite matt, lacquered	4715 70 06	10
Aluminium, aluminium anodised	* 4715 70 03	10
Stainless steel, metal matt finish	4715 70 04	10

New



SCHUKO socket outlet

i 853


- enhanced contact protection - with plug-in terminals



Rated voltage 250 V~
Rated current 16 A

Design	Order no.	PU
polar white glossy	4735 70 09	10
anthracite matt, lacquered	4735 70 06	10
Aluminium, aluminium anodised	* 4735 70 03	10
Stainless steel, metal matt finish	4735 70 04	10

New



SCHUKO socket outlet

i 853

- Screw-in lift terminals - with screw-in lift terminals



Rated voltage 250 V~
Rated current 16 A

Design	Order no.	PU
polar white glossy	4115 70 09	10
anthracite matt, lacquered	4115 70 06	10
Aluminium, aluminium anodised	* 4115 70 03	10
Stainless steel, metal matt finish	4115 70 04	10

New



SCHUKO socket outlet

i 853

- enhanced contact protection - with screw-in lift terminals
- Screw-in lift terminals





Rated voltage 250 V~
Rated current 16 A

Design	Order no.	PU
polar white glossy	4135 70 09	10
anthracite matt, lacquered	4135 70 06	10
Aluminium, aluminium anodised	* 4135 70 03	10
Stainless steel, metal matt finish	4135 70 04	10

New **SCHUKO socket outlet** **i** 853


- Labelling field - with plug-in terminals

Rated voltage 250 V~
Rated current 16 A




Labelling field height arranged for P-touch strips 6 mm.

Design	Order no.	PU
polar white glossy	4739 70 09	10
anthracite matt, lacquered	4739 70 06	10
aluminium matt, lacquered	* 4739 70 03	10
stainless steel matt, lacquered	4739 70 04	10



New **SCHUKO socket outlet** **i** 853


- Labelling field - with plug-in terminals
- enhanced contact protection

Rated voltage 250 V~
Rated current 16 A



Labelling field height arranged for P-touch strips 6 mm.

Design	Order no.	PU
polar white glossy	4738 70 09	10
anthracite matt, lacquered	4738 70 06	10
aluminium matt, lacquered	* 4738 70 03	10
stainless steel matt, lacquered	4738 70 04	10



New **SCHUKO socket outlet 45°** **i** 853

- Labelling field - for diagonal installation
- with plug-in terminals





Rated voltage 250 V~
Rated current 16 A

Specially suited to combinations of several socket outlets if right angle plugs are used.

Labelling field height designed for 6 mm P-touch strips.

Design	Order no.	PU
polar white glossy	4728 71 09	10
anthracite matt, lacquered	4728 71 06	10
aluminium matt, lacquered	* 4728 71 03	10
stainless steel matt, lacquered	4728 71 04	10



New



SCHUKO socket outlet with LED orientation light

i 853

- enhanced contact protection
- Screw-in lift terminals



Rated voltage	250 V~
Frequency	50/60 Hz
Rated current	16 A
Power consumption	0,25 W/0,35 VA
Switch-off brightness	ca. 4 lx
Light intensity (white)	0.2 cd
Switch-on brightness	ca. 2 lx
Conductor cross-section (rigid)	max. 2.5 mm ²

- additional benefit by combination of a socket outlet with an orientation light
- integrated brightness sensor that switches the orientation light on at twilight and off when there is sufficient brightness
- long service life of the LED
- white LED light
- through-wiring possible, therefore also ideal for retrofitting
- with screw-in lift terminals

Caution!
Items with special flush-mounted insert.
Centre plates with LED orientation lights are not compatible with the standard socket outlets.

Design	Order no.	PU
polar white glossy	★ 4109 70 09	10
anthracite matt, lacquered	★ 4109 70 06	10
aluminium matt, lacquered	★ 4109 70 03	10
stainless steel matt, lacquered	★ 4109 70 04	10



SCHUKO socket outlet with control LED

i 853

- Labelling field
- enhanced contact protection
- Screw-in lift terminals



Rated voltage	250 V~
Rated current	16 A

- with screw-in lift terminals

Labelling field height arranged for P-touch strips 6 mm.

Design	Order no.	PU
polar white glossy	4110 70 09	10



New



Double SCHUKO socket outlet with cover plate

i 853

Rated voltage	250 V~	- with plug-in terminals
Rated current	16 A	
Assembling height	22 mm	

For installation in 1gang wall boxes according to according to DIN 49073-1

Design	Order no.	PU
polar white glossy	4753 70 09	10
anthracite matt, lacquered	4753 70 06	10
aluminium matt, lacquered	★ 4753 70 03	10
stainless steel matt, lacquered	4753 70 04	10



New



Double SCHUKO socket outlet with cover plate

i 853

- enhanced contact protection
- with plug-in terminals



Rated voltage	250 V~
Rated current	16 A
Assembling height	22 mm

For installation in 1gang wall boxes according to DIN 49073-1

Design	Order no.	PU
polar white glossy	4729 70 09	10
anthracite matt, lacquered	4729 70 06	10
aluminium matt, lacquered	* 4729 70 03	10
stainless steel matt, lacquered	4729 70 04	10



SCHUKO socket outlets with hinged cover



Marked items are only suitable for splash-protected IP44 flush-mounted installation when used in conjunction with the sealing set, order no. 1010 72 00.

New



SCHUKO socket outlet with hinged cover

i 853

- enhanced contact protection
- when opening hinged cover, it can be arrested in end position
- with imprint
- with plug-in terminals

Rated voltage	250 V~
Rated current	16 A

Design	Order no.	PU
polar white glossy	4751 71 09	10
anthracite matt, lacquered	4751 71 06	10
Aluminium, aluminium anodised	* 4751 71 03	10
Stainless steel, metal matt finish	4751 71 04	10



New



SCHUKO socket outlet with hinged cover

i 853

- enhanced contact protection
- with self-closing hinged covers
- with imprint
- with plug-in terminals

Rated voltage	250 V~	Suitable for optional	Order no.	Page
Rated current	16 A	Sealing set for socket outlets/centre plates	1010 72 00	336

Design	Order no.	PU
polar white glossy	4751 72 09	10
anthracite matt, lacquered	4751 72 06	10
Aluminium, aluminium anodised	* 4751 72 03	10
Stainless steel, metal matt finish	4751 72 04	10



New



SCHUKO socket outlet with hinged cover

i 853

- enhanced contact protection
- when opening hinged cover, it can be arrested in end position
- with imprint
- mounting orientation of insert selectable in 45° steps
- with plug-in terminals

Rated voltage	250 V~
Rated current	16 A


Specially suited to combinations of several socket outlets if right angle plugs are used.



Design	Order no.	PU
polar white glossy	4747 71 09	10
anthracite matt, lacquered	4747 71 06	10
Aluminium, aluminium anodised	* 4747 71 03	10
Stainless steel, metal matt finish	4747 71 04	10



New **SCHUKO socket outlet with hinged cover** **i** 853

- Labelling field
- enhanced contact protection
- when opening hinged cover, it can be arrested in end position
- with imprint
- with plug-in terminals







Rated voltage 250 V~
Rated current 16 A

Labelling field height arranged for 6 mm P-touch strips.


Specially suited to combinations of several socket outlets if right angle plugs are used.



Design	Order no.	PU
polar white glossy	4752 71 09	10
anthracite matt, lacquered	4752 71 06	10
Aluminium, aluminium anodised	* 4752 71 03	10
Stainless steel, metal matt finish	4752 71 04	10



New **SCHUKO socket outlet with hinged cover** **i** 853

- Labelling field
- enhanced contact protection
- with self-closing hinged covers
- with imprint
- with plug-in terminals




Rated voltage 250 V~
Rated current 16 A

Labelling field height arranged for 6 mm P-touch strips.

Specially suited to combinations of several socket outlets if right angle plugs are used.


Design	Order no.	Page
polar white glossy	4752 72 09	10
anthracite matt, lacquered	4752 72 06	10
Aluminium, aluminium anodised	* 4752 72 03	10
Stainless steel, metal matt finish	4752 72 04	10




Suitable for optional	Order no.	Page
Sealing set for socket outlets/centre plates	1010 72 00	336



New **SCHUKO socket outlet with hinged cover** **i** 853

- Labelling field
- enhanced contact protection
- Installation position variable in 45° steps
- when opening hinged cover, it can be arrested in end position
- with imprint
- mounting orientation of insert selectable in 45° steps
- with plug-in terminals








Rated voltage 250 V~
Rated current 16 A

Labelling field height arranged for 6 mm P-touch strips.

Specially suited to combinations of several socket outlets if right angle plugs are used.

Design	Order no.	PU
polar white glossy	4748 71 09	10
anthracite matt, lacquered	4748 71 06	10
Aluminium, aluminium anodised	* 4748 71 03	10
Stainless steel, metal matt finish	4748 71 04	10



SCHUKO socket outlets with safety device

New



SCHUKO socket outlet with overvoltage protection

i 882

- Labelling field
- Screw terminals



Rated voltage 250 V~
Frequency 50/60 Hz
Rated current 16 A

- with indicator LED for "on/error"
- with acoustic fault signal
- with imprint
- with screw terminals

Labelling field height arranged for P-touch strips 6 mm.
Overvoltage protection to according to EN 61643 and VDE 0675-6-11

Design	Order no.	PU
polar white glossy	4152 71 09	1
anthracite matt, lacquered	4152 71 06	1
aluminium matt, lacquered	* 4152 71 03	1
stainless steel matt, lacquered	4152 71 04	1



New



SCHUKO socket outlet with residual current circuit-breaker

i 909

- enhanced contact protection



Rated voltage 250 V~
Frequency 50/60 Hz
Rated current 16 A
Measurement error current 30 mA
Trigger time ≤ 30 ms
Surge current resistance 250 A (8/20) μs
Short-circuit resistance (with back-up fuse 20 AgL) 3 kA

- type A for alternating currents and pulsating direct currents
- to protect connected and downstream loads
- with plug-in terminals

Through-wired socket outlets are also protected.
Tested conform according to VDE 0664 (EN 61008)
Suitable for use according to according to DIN VDE 0100-410

Design	Order no.	PU
polar white glossy	4708 70 09	1
anthracite matt, lacquered	4708 70 06	1
aluminium matt, lacquered	* 4708 70 03	1
stainless steel matt, lacquered	4708 70 04	1



SCHUKO socket outlets for special applications



SCHUKO socket outlet

i 853

Rated voltage 250 V~
Rated current 16 A

- with plug-in terminals

Insert colour-coded.

Design	Order no.	PU
red glossy	4715 70 15	10
green glossy	4715 70 13	10
orange glossy	4715 70 14	10





SCHUKO socket outlet with imprint

i 853

Rated voltage 250 V~ - with plug-in terminals
Rated current 16 A

Insert colour-coded.

Labelling field height designed for 6 mm P-touch strips.

Design	Order no.	PU
red glossy, Imprint "EDV"	4715 71 15	10
green glossy, Imprint "SV"	4715 71 13	10
orange glossy, Imprint "ZSV"	4715 71 14	10



SCHUKO socket outlet

i 853

- Labelling field - with plug-in terminals



Rated voltage 250 V~
Rated current 16 A

Insert colour-coded.

Labelling field height designed for 6 mm P-touch strips.

Design	Order no.	PU
red glossy	4739 70 15	10
green glossy	4739 70 13	10
orange glossy	4739 70 14	10



SCHUKO socket outlet with imprint

i 853

- Labelling field - with plug-in terminals



Rated voltage 250 V~
Rated current 16 A

Insert colour-coded.

Labelling field height arranged for P-touch strips 6 mm.

Design	Order no.	PU
red glossy, Imprint "EDV"	4739 71 15	10
green glossy, Imprint "SV"	4739 71 13	10
orange glossy, Imprint "ZSV"	4739 71 14	10



SCHUKO socket outlet with control LED and imprint

i 853

- Labelling field - with screw-in lift terminals
- enhanced contact protection
- Screw-in lift terminals



Rated voltage 250 V~
Rated current 16 A

Insert colour-coded.

Labelling field height arranged for P-touch strips 6 mm.

Execution SV, ZSV to according to VDE 0100-710

Design	Order no.	PU
red glossy, Imprint "EDV"	4110 71 15	10
green glossy, Imprint "SV"	4110 71 13	10
orange glossy, Imprint "ZSV"	4110 71 14	10





SCHUKO socket outlet with overvoltage protection

i 882

- Labelling field
- Screw terminals



- with imprint
- with indicator LED for "on/error"
- with acoustic fault signal
- with screw terminals

Rated voltage 250 V~
Frequency 50/60 Hz
Rated current 16 A

Insert colour-coded.

Labelling field height designed for 6 mm P-touch strips.
Overvoltage protection to according to EN 61643 and VDE 0675-6-11



Design	Order no.	PU
red glossy	4152 71 15	1

International socket outlet systems

- Connection terminals according to IEC 60884-1
- Socket outlets with enhanced contact protection (child protection) according to IEC 60884-1

Socket outlets without earthing contact



New

Socket outlet without earthing contact

i 853

Rated voltage 250 V~ - without spreader claws
Rated current 16 A - 2pole
Mirror depth 8 mm - with plug-in terminals

Design	Order no.	PU
polar white glossy	61 6715 70 09	10
anthracite matt, lacquered	61 6715 70 06	10
aluminium matt, lacquered	* 61 6715 70 03	10
stainless steel matt, lacquered	61 6715 70 04	10



Socket outlet without earthing contact EURO-AMERICAN STANDARD

- enhanced contact protection



- centre plate for plug-in fixing
- without spreader claws
- 2pole
- with screw terminals

Rated voltage 250 V~
Rated current 10 A
Conductor cross-section (rigid) max. 4 mm²

Only for Asia.



Design	Order no.	PU
polar white glossy	33 4207 80 09	1

Socket outlets with earthing pin

New



Socket outlet with earthing pin

i 853

- enhanced contact protection

- 2pole + earth
- with plug-in terminals



Rated voltage	250 V~
Rated current	16 A
Mirror depth	14.7 mm

Design	Order no.	PU
polar white glossy	67 6875 70 09	10
anthracite matt, lacquered	67 6875 70 06	10
Aluminium, aluminium anodised	* 67 6875 70 03	10
Stainless steel, metal matt finish	67 6875 70 04	10



New



Socket outlet with earthing pin

i 853

- enhanced contact protection
- Screw-in lift terminals

- 2pole + earth
- with screw-in lift terminals



Rated voltage	250 V~
Rated current	16 A
Mirror depth	14.7 mm

Design	Order no.	PU
polar white glossy	67 6575 70 09	10
anthracite matt, lacquered	67 6575 70 06	10
Aluminium, aluminium anodised	* 67 6575 70 03	10
Stainless steel, metal matt finish	67 6575 70 04	10



New



Socket outlet with earthing pin and LED orientation light

i 853

- enhanced contact protection
- Screw-in lift terminals

- additional benefit by combination of a socket outlet with an orientation light
- integrated brightness sensor that switches the orientation light on at twilight and off when there is sufficient brightness
- long service life of the LED
- white LED light
- 2pole + earth
- through-wiring possible, therefore also ideal for retrofitting
- with screw-in lift terminals



Rated voltage	250 V~
Frequency	50/60 Hz
Rated current	16 A
Power consumption	0,25 W/0,35 VA
Switch-off brightness	ca. 4 lx
Light intensity (white)	0.2 cd
Switch-on brightness	ca. 2 lx
Conductor cross-section (rigid)	max. 2.5 mm ²

Caution!
Items with special flush-mounted insert.
Centre plates with LED orientation lights are not compatible with the standard socket outlets.

Design	Order no.	PU
polar white glossy	* 67 6510 70 09	10
anthracite matt	* 67 6510 70 06	10
aluminium matt, lacquered	* 67 6510 70 03	10
stainless steel matt, lacquered	* 67 6510 70 04	10





Socket outlet with earth contact pin and monitoring LED

i 853

- enhanced contact protection
- Screw-in lift terminals
- 2pole + earth
- with screw-in lift terminals



Rated voltage 250 V~
Rated current 16 A



Design	Order no.	PU
polar white glossy	67 6509 70 09	10

New



Socket outlet with earthing pin and hinged cover

i 853

- enhanced contact protection
- when opening hinged cover, it can be arrested in end position
- with imprint
- 2pole + earth
- with plug-in terminals



Rated voltage 250 V~
Rated current 16 A



Design	Order no.	PU
polar white glossy	67 6877 71 09	10
anthracite matt, lacquered	67 6877 71 06	10
Aluminium, aluminium anodised	* 67 6877 71 03	10
Stainless steel, metal matt finish	67 6877 71 04	10

New



Socket outlet with earthing pin and hinged cover

i 853

- enhanced contact protection
- Screw-in lift terminals
- when opening hinged cover, it can be arrested in end position
- with imprint
- 2pole + earth
- with screw-in lift terminals




Rated voltage 250 V~
Rated current 16 A



Design	Order no.	PU
polar white glossy	67 6577 71 09	10
anthracite matt, lacquered	67 6577 71 06	10
Aluminium, aluminium anodised	* 67 6577 71 03	10
Stainless steel, metal matt finish	67 6577 71 04	10

British Standard socket outlets



Socket outlet insert with earthing contact BRITISH STANDARD, can be switched off

- enhanced contact protection
- Screw terminals
- without spreader claws
- 2pole + earth
- with screw terminals



Rated voltage 250 V~
Rated current 13 A

Design	Order no.	PU
white glossy	# 3342 02 12	10
polar white glossy	# 3342 02 19	10
anthracite matt	# 3342 02 16	10
brown glossy	# 3342 02 11	10

New



Centre plate for socket outlets, British Standard, can be switched off

Suitable for
Socket outlet insert with earthing contact
BRITISH STANDARD, can be switched off

Order no. 3342 02 ..

Page 199

Design	Order no.	PU
white glossy	* 33 1307 70 02	10
polar white glossy	* 33 1307 70 09	10
anthracite matt, lacquered	* 33 1307 70 06	10
aluminium matt, lacquered	* 33 1307 70 24	10
stainless steel matt, lacquered	* 33 1307 70 04	10



Socket outlet with earthing contact CHINA 10 A

- enhanced contact protection
- Screw terminals



- centre plate for plug-in fixing
- without spreader claws
- 2pole + earth
- with screw terminals

Rated voltage 250 V~
Rated current 10 A
Conductor cross-section (rigid) max. 4 mm²

Only for Asia.



Design	Order no.	PU
polar white glossy	33 4208 80 09	1



Socket outlet with earthing contact CHINA 16 A

- enhanced contact protection
- Screw terminals



- centre plate for plug-in fixing
- without spreader claws
- 2pole + earth
- with screw terminals

Rated voltage 250 V~
Rated current 16 A
Conductor cross-section (rigid) max. 4 mm²

Only for Asia.



Design	Order no.	PU
polar white glossy	33 4209 80 09	1

Socket outlets with earthing pin for special applications



Socket outlet with earth contact pin and monitoring LED

i 853

- enhanced contact protection
- Screw-in lift terminals



- 2pole + earth
- with screw-in lift terminals

Rated voltage 250 V~
Rated current 16 A



Design	Order no.	PU
red glossy	67 6509 70 15	10
green glossy	67 6509 70 13	10
orange glossy	67 6509 70 14	10

Covers for switches/push-buttons

Rockers



Marked items are only suitable for splash-protected IP44 flush-mounted installation when used in conjunction with the sealing set, order no. 1010 71 00.

New



Rocker

Not suitable for rocker push-button switches.

– also for KNX applications: push-button, 1 gang, and group push-button, 1 gang

Suitable for	Order no.	Page
Rocker switches		page 20
Rocker push-buttons		page 20
optional		
Sealing set for switches/push-buttons	1010 71 00	337

Design	Order no.	PU
polar white glossy	1405 70 09	10
anthracite matt, lacquered	1405 70 06	10
Aluminium, aluminium anodised	* 1405 70 03	10
Stainless steel, metal matt finish	1405 70 04	10

New



Rocker

- Labelling field



For labelling with names, notes etc.

– also for KNX applications: push-button, 1 gang, and group push-button, 1 gang

Suitable for	Order no.	Page
Rocker switches		page 20
Rocker push-buttons		page 20
optional		
Sealing set for switches/push-buttons	1010 71 00	337

Labelling field height designed for 6 mm P-touch strip.
Not suitable for rocker push-button switches.

Design	Order no.	PU
polar white glossy	1426 70 09	10
anthracite matt, lacquered	1426 70 06	10
Aluminium, aluminium anodised	* 1426 70 03	10
Stainless steel, metal matt finish	1426 70 04	10

New



Rocker

- Lens



The IP44 degree of protection can only be achieved in conjunction with the appropriate neon, incandescent or LED lamp unit, as well as a sealing set for switches/push-buttons.


– for illumination and monitoring circuit
– also for KNX applications: push-button, 1 gang, and group push-button, 1 gang

Suitable for	Order no.	Page
Rocker switches		page 20
Rocker push-buttons		page 20
optional		
Sealing set for switches/push-buttons	1010 71 00	337

Not suitable for rocker push-button switches.

Lenses with symbol for light, bell, door and neutral in clear, also neutral in red transparent.

Design	Order no.	PU
polar white glossy	1415 70 09	10
anthracite matt, lacquered	1415 70 06	10
Aluminium, aluminium anodised	* 1415 70 03	10
Stainless steel, metal matt finish	1415 70 04	10



Rocker

- Labelling field
- Lens



The IP44 degree of protection can only be achieved in conjunction with the appropriate neon, incandescent or LED lamp unit, as well as a sealing set for switches/push-buttons.

For labelling with names, notes etc.

Labelling field height designed for 6 mm P-touch strip.
Not suitable for rocker push-button switches.

Lenses with symbol for light, bell, door and neutral in clear, also neutral in red transparent.

- for illumination and monitoring circuit
- also for KNX applications: push-button, 1gang, and group push-button, 1gang

Suitable for	Order no.	Page
Rocker switches		page 20
Rocker push-buttons		page 20
optional		
Sealing set for switches/push-buttons	1010 71 00	337

Design	Order no.	PU
polar white glossy	1415 71 09	10
anthracite matt, lacquered	1415 71 06	10
Aluminium, aluminium anodised	* 1415 71 03	10
Stainless steel, metal matt finish	1415 71 04	10



Rocker

- Large labelling field
- Lens



Labelling field (W x H) \approx 49.5 x 20.3 mm

The IP44 degree of protection can only be achieved in conjunction with the appropriate neon, incandescent or LED lamp unit, as well as a sealing set for switches/push-buttons.

Labelling field height arranged for two 9 mm P-touch strips.

Not suitable for rocker push-button switches.

Lenses with symbol for light, bell, door and neutral in clear, also neutral in red transparent.

- for illumination and monitoring circuit
- also for KNX applications: push-button, 1gang, and group push-button, 1gang

Suitable for	Order no.	Page
Rocker switches		page 20
Rocker push-buttons		page 20
optional		
Sealing set for switches/push-buttons	1010 71 00	337

Design	Order no.	PU
polar white glossy	1496 70 09	10
anthracite matt, lacquered	1496 70 06	10
aluminium matt, lacquered	* 1496 70 03	10
stainless steel matt, lacquered	1496 70 04	10

Rockers for multi-pole rocker switches

Marked items are only suitable for splash-protected IP44 flush-mounted installation when used in conjunction with the sealing set, order no. 1010 71 00.



Rocker with imprint "0"

Not suitable for rocker push-button switches.

Suitable for	Order no.	Page
Multi-pole rocker switches		page 26
optional		
Sealing set for switches/push-buttons	1010 71 00	337

Design	Order no.	PU
polar white glossy	1425 71 09	10
anthracite matt, lacquered	1425 71 06	10
Aluminium, aluminium anodised	* 1425 71 03	10
Stainless steel, metal matt finish	1425 71 04	10



Rocker with imprint "0"

- Red lens



The IP44 degree of protection can only be achieved in conjunction with the appropriate neon, incandescent or LED lamp unit, as well as a sealing set for switches/push-buttons.


Not suitable for rocker push-button switches.

- for illumination and monitoring circuit
- also for KNX applications: group push-button, 1gang

Suitable for	Order no.	Page
Multi-pole rocker switches		page 26
optional		
Sealing set for switches/push-buttons	1010 71 00	337

Design	Order no.	PU
polar white glossy	1417 71 09	10
anthracite matt, lacquered	1417 71 06	10
Aluminium, aluminium anodised	* 1417 71 03	10
Stainless steel, metal matt finish	1417 71 04	10

Multiple Rockers



Rocker 2gang

Not suitable for rockers push-button switches.

- also for KNX applications: push-button, 2gang, and group push-button, 2gang

Suitable for	Order no.	Page
Rocker switches, 2gang		page 28
Series push-buttons		page 29

Design	Order no.	PU
polar white glossy	1435 70 09	10
anthracite matt, lacquered	1435 70 06	10
Aluminium, aluminium anodised	* 1435 70 03	10
Stainless steel, metal matt finish	1435 70 04	10



Rocker 2gang

- Red lens



Not suitable for rockers push-button switches.

- for illumination and monitoring circuit
- also for KNX applications: push-button, 2gang, and group push-button, 2gang

Suitable for	Order no.	Page
Rocker switches, 2gang		page 28
Series push-buttons		page 29

Design	Order no.	PU
polar white glossy	1437 70 09	10
anthracite matt, lacquered	1437 70 06	10
aluminium matt, lacquered	* 1437 70 03	10
stainless steel matt, lacquered	1437 70 04	10



Rocker 3gang

Suitable for	Order no.	Page
On/off switch 3gang	6330 23	31

Design	Order no.	PU
polar white glossy	1465 70 09	10
anthracite matt, lacquered	1465 70 06	10
Aluminium, aluminium anodised	* 1465 70 03	10
stainless steel matt, lacquered	1465 70 04	10

Centre plates for pullcord switches/pullcord push-buttons



Centre plate for pullcord switch/pullcord push-button

Suitable for	Order no.	Page
Pullcord switches/pullcord push-buttons		page 32

Design	Order no.	PU
polar white glossy	1147 70 09	10
anthracite matt, lacquered	1147 70 06	10

Centre plates for key switches/key push-buttons

Marked items are only suitable for splash-protected IP44 flush-mounted installation when used in conjunction with the sealing set, order no. 1010 70 00.

New



Centre plate for key switch/key push-button



Design

Design	Order no.	Page
polar white glossy	1505 70 09	10
anthracite matt, lacquered	1505 70 06	10
aluminium matt, lacquered	* 1505 70 03	10
stainless steel matt, lacquered	1505 70 04	10

– for master-key systems

Suitable for	Order no.	Page
Key switches/key push-buttons		page 33
Lock cylinder	1818 ..	75
optional		
Sealing set for key switch/key push-button	1010 70 00	337

Centre plates for protection switches



50 x 50 mm centre plate for RCD protection switch

Caution!
Use only with intermediate ring for 50 x 50 mm centre plate from the corresponding range.

Design

Design	Order no.	Page
polar white glossy	1493 09	1
anthracite matt	1493 16 06	1
stainless steel matt, lacquered	1493 04	1

Suitable for	Order no.	Page
Residual current circuit-breaker	2844	34

Timers

New

Centre plate for mechanical timer



Design

Design	Order no.	Page
with time scale 15 min		
polar white glossy	1634 71 09	1
anthracite matt, lacquered	1634 71 06	1
Aluminium, aluminium anodised	* 1634 71 03	1
Stainless steel, metal matt finish	1634 71 04	1

Order no. PU

New



with time scale 120 min

polar white glossy	1635 71 09	1
anthracite matt, lacquered	1635 71 06	1
Aluminium, aluminium anodised	* 1635 71 03	1
Stainless steel, metal matt finish	1635 71 04	1

New

Timer comfort for sensors



854



- Display



- 2 independent programme memories for everyday/holidays
- connected RolloTec brightness sensor can be used for twilight-controlled switching-on
- astro programme for sunrise/sundown switching
- with preset basic programme
- with week and day programme
- after charging, the timer can also be programmed when removed.

Design

Design	Order no.	Page
polar white glossy	1738 71 09	1
anthracite matt, lacquered	1738 71 06	1
aluminium matt, lacquered	* 1738 71 03	1
stainless steel matt, lacquered	1738 71 04	1

Suitable for	Order no.	Page
Insert for timer	2948	38
optional		
RolloTec brightness sensor	169	128
RolloTec adapter for sensors	171	129
RolloTec brightness sensor surface-mounted	184	128



New



Timer comfort

i 854

- Display



- 2 independent programme memories for everyday/holidays
- astro programme for sunrise/sundown switching
- with preset basic programme
- with week and day programme

Suitable for	Order no.	Page
Insert for timer	2948	38
Design	Order no.	PU
polar white glossy	1736 71 09	1
anthracite matt, lacquered	1736 71 06	1
aluminium matt, lacquered	* 1736 71 03	1
stainless steel matt, lacquered	1736 71 04	1



New



Timer Easy

i 854

- Display



- 2 programme blocks Mon. - Fri. and Sat. - Sun.
- simple programming of switching times
- programmable for approx. 4 h after removing insert
- with quick programming mode

Suitable for	Order no.	Page
Insert for timer	2948	38
Design	Order no.	PU
polar white glossy	1735 70 09	1
anthracite matt, lacquered	1735 70 06	1
aluminium matt, lacquered	* 1735 70 03	1
stainless steel matt, lacquered	1735 70 04	1



Covers for dimmers

Centre plates for rotary dimmers

Marked items are only suitable for splash-protected IP44 flush-mounted installation when used in conjunction with the sealing set, order no. 1010 72 00.

New



Centre plate for rotary dimmer

- Setting knob



Suitable for	Order no.	Page
Rotary dimmers		page 40
Rotary potentiometers DALI		page 44
1-10 V Rotary potentiometers		page 45
optional		
Sealing set for socket outlets/centre plates	1010 72 00	336


Axis dimension Ø

4 mm

Design	Order no.	PU
polar white glossy	1135 70 09	10
anthracite matt, lacquered	1135 70 06	10
Aluminium, aluminium anodised	* 1135 70 03	10
Stainless steel, metal matt finish	1135 70 04	10

Push-buttons

New



Button for universal series touch dimmer

i 857

Suitable for	Order no.	Page
Universal series touch dimmer (R, L, C)	2901	47

Design	Order no.	PU
polar white glossy	1765 70 09	1
anthracite matt, lacquered	1765 70 06	1
Aluminium, aluminium anodised	* 1765 70 03	1
Stainless steel, metal matt finish	1765 70 04	1



BLC -Berker Light Control

BLC push-buttons

New

BLC push-button

i 859



Design	Order no.	PU
polar white glossy	1761 70 09	1
anthracite matt, lacquered	1761 70 06	1
Aluminium, aluminium anodised	* 1761 70 03	1
Stainless steel, metal matt finish	1761 70 04	1

Suitable for	Order no.	Page
BLC switches		page 53
BLC dimmers		page 56
BLC insert for timer	2934 10	56
BLC extension unit	2907	57

BLC controller

New

BLC controller comfort 1.1 m

i 862



Delay time, adjustable	≈ 10 s ... 30 min	- with teach function for response brightness
Detection angle	180 °	- with slide switch for OFF/automatic/ON
Response brightness, adjustable	≈ 0 ... 80 lx, ∞ lx (day)	- step operation with immunity time (e.g. for bell)
		- with cover to limit detection angle to 90°

Suitable for	Order no.	Page
BLC switches		page 53
BLC dimmers		page 56
BLC insert for timer	2934 10	56
BLC extension unit for motion detector	2908	91

Design	Order no.	PU
Nominal mounting height 1.1 m		
polar white glossy	1784 70 09	1
anthracite matt, lacquered	1784 70 06	1
aluminium matt, lacquered	* 1784 70 03	10
stainless steel matt, lacquered	1784 70 04	1

New

BLC IR controller comfort 2.2 m with hand-held transmitter

i 863



Delay time, adjustable	≈ 10 s ... 60 min	- with 2 buttons for permanent ON (LED green), permanent OFF (LED red) and automatic
Detection angle	180 °	- with detection and IR receiver LED red, and IR confirmation LED green
Scope of delivery:		- with teach function for response brightness
- BLC IR controller comfort		- presence simulation via remote control: retrieval of the switching operations from the last 7 days
- IR hand-held transmitter		- hotel mode via remote control: without motion dimming to 20%
		- short-time mode with immunity time (e.g. for bell) via remote control
		- test mode via remote control: response sensitivity 100%, time delay 1 s and day mode

Suitable for	Order no.	Page
BLC switches		page 53
BLC dimmers		page 56
BLC insert for timer	2934 10	56
BLC extension unit for motion detector	2908	91

Design	Order no.	PU
Nominal mounting height 2.2 m		
polar white glossy	1789 70 09	1
anthracite matt, lacquered	1789 70 06	1
aluminium matt, lacquered	* 1789 70 03	1
stainless steel matt, lacquered	1789 70 04	1





New

BLC controller

i 862

Delay time ≈ 2 min
 Detection angle 180 °
 Response brightness, adjustable ≈ 0 ... 80 lx, ∞ lx (day)

Suitable for
 BLC switches
 BLC dimmers
 BLC insert for timer
 BLC extension unit for motion detector

Order no.
 2934 10
 2908

Page
 page 53
 page 56
 56
 91

Design

Order no.

PU

Nominal mounting height 1.1 m

polar white glossy ¹⁾	1783 70 09	1
anthracite matt, lacquered ¹⁾	1783 70 06	1
aluminium matt, lacquered ¹⁾	* 1783 70 03	1
stainless steel matt, lacquered ¹⁾	1783 70 04	1

Nominal mounting height 2.2 m

polar white glossy	1788 70 09	1
anthracite matt, lacquered	1788 70 06	1
aluminium matt, lacquered	* 1788 70 03	1
stainless steel matt, lacquered	1788 70 04	1

¹⁾ with cover to limit detection angle to 90°



New



BLC controller comfort IP44

i 862

Delay time, adjustable ≈ 10 s ... 30 min
 Detection angle 180 °
 Response brightness, adjustable ≈ 0 ... 80 lx, ∞ lx (day)

– with teach function for response brightness
 – with cover to limit detection angle to 90°

Suitable for
 BLC switches
 BLC dimmers
 BLC insert for timer
 BLC extension unit for motion detector

Order no.
 2934 10
 2908

Page
 page 53
 page 56
 56
 91

Design

Order no.

PU

Nominal mounting height 1.1 m

polar white glossy	1784 71 09	1
anthracite matt, lacquered	1784 71 06	1

Nominal mounting height 2.2 m

polar white glossy	1787 71 09	1
anthracite matt, lacquered	1787 71 06	1

IP44



BLC controller IP44

i 862

Delay time ≈ 2 min
 Detection angle 180 °
 Response brightness, adjustable ≈ 0 ... 80 lx, ∞ lx (day)

– with cover to limit detection angle to 90°

Suitable for
 BLC switches
 BLC dimmers
 BLC insert for timer
 BLC extension unit for motion detector

Order no.
 2934 10
 2908

Page
 page 53
 page 56
 56
 91

Design

Order no.

PU

Nominal mounting height 1.1 m

polar white glossy	1783 71 09	1
anthracite matt, lacquered	1783 71 06	1

Nominal mounting height 2.2 m

polar white glossy	1786 71 09	1
anthracite matt, lacquered	1786 71 06	1

IP44



Covers for blind switches/push-buttons

Rockers with imprint

New



Rocker 2gang with imprinted arrow symbol

- also for KNX applications: push-button, 2gang
- for blind series switch/push-button

Design	Order no.	Page
polar white glossy	1435 71 09	10
anthracite matt, lacquered	1435 71 06	10
Aluminium, aluminium anodised	* 1435 71 03	10
Stainless steel, metal matt finish	1435 71 04	10

Suitable for
Switch / push-button for blinds

Order no. Page
page 112

New



Rocker 2gang with imprinted arrows symbol

- also for KNX applications: group push-button, 2gang

Design	Order no.	Page
polar white glossy	1435 72 09	10
anthracite matt, lacquered	1435 72 06	10
Aluminium, aluminium anodised	* 1435 72 03	10
Stainless steel, metal matt finish	1435 72 04	10

Suitable for
Group series push-button, 4 NO contacts,
common input terminal

Order no. Page
5034 04 29

Centre plates for rotary switches for blinds

Marked items are only suitable for splash-protected IP44 flush-mounted installation when used in conjunction with the sealing set, order no. 1010 72 00.

New



Centre plate with rotary knob for rotary switch for blinds

- with imprint

Design	Order no.	Page
polar white glossy	1077 71 09	1
anthracite matt, lacquered	1077 71 06	1
Aluminium, aluminium anodised	* 1077 71 03	1
Stainless steel, metal matt finish	1077 71 04	1

Suitable for
Rotary switch for blinds

Order no. Page
page 114

optional
Sealing set for socket outlets/centre plates 1010 72 00 336
Interlock disk for rotary switch for blinds 1861 115

Centre plates for key switches/key push-buttons for blinds

Marked items are only suitable for splash-protected IP44 flush-mounted installation when used in conjunction with the sealing set, order no. 1010 70 00.

New



Centre plate with lock and push lock function for switch for blinds

- Key can be removed in 0 position



- with imprint
- with 2 keys

Design	Order no.	Page
polar white glossy	1079 71 09	1
anthracite matt, lacquered	1079 71 06	1
Aluminium, aluminium anodised	* 1079 71 03	1
Stainless steel, metal matt finish	1079 71 04	1

Suitable for
Switch for blinds 1pole for centre plate with lock 3851 115

Switch for blinds 2pole for centre plate with lock 3852 115

New



Centre plate with lock and push lock function for switch for blinds

- Key can be removed in 3 positions



- with imprint
- with 2 keys

Suitable for	Order no.	Page
Switch for blinds 1pole for centre plate with lock	3851	115
Switch for blinds 2pole for centre plate with lock	3852	115

Design	Order no.	PU
polar white glossy	1079 72 09	1
anthracite matt, lacquered	1079 72 06	1
Aluminium, aluminium anodised	* 1079 72 03	1
Stainless steel, metal matt finish	1079 72 04	1

New



Centre plate with lock and touch function for switch for blinds

- Key can be removed in 0 position



- with imprint
- with 2 keys

Suitable for	Order no.	Page
Switch for blinds 1pole for centre plate with lock	3851	115
Switch for blinds 2pole for centre plate with lock	3852	115

Design	Order no.	PU
polar white glossy	1079 73 09	1
anthracite matt, lacquered	1079 73 06	1
Aluminium, aluminium anodised	* 1079 73 03	1
Stainless steel, metal matt finish	1079 73 04	1

New



Centre plate for key push-button for blinds/key switch

- with imprint
- for lock cylinder
- for master-key systems

Suitable for	Order no.	Page
Switch for blinds 1pole for lock cylinder	3821 20	117
Switch for blinds 2pole for lock cylinder	3822 10	118
Push-button for blinds 1pole for lock cylinder	3831 ..	118
Push-button for blinds 2pole for lock cylinder	3832 10	118
Lock cylinder	1818 ..	75
optional		
Sealing set for key switch/key push-button	1010 70 00	337

Design	Order no.	PU
polar white glossy	1504 71 09	10
anthracite matt, lacquered	1504 71 06	10
aluminium matt, lacquered	* 1504 71 03	10
stainless steel matt, lacquered	1504 71 04	10

Rollotec

RolloTec buttons

New

RolloTec button comfort for sensors

i 886



- Runtime when using a surface-mounted brightness sensor, the learned running time for sun protection movement is used
- only for sensor connection to terminal block

Suitable for	Order no.	Page
RolloTec inserts		page 121
optional		
RolloTec glass breakage sensor	170	128
RolloTec adapter for sensors	171	129
RolloTec brightness sensor	169	128
Magnetic contact	9251 0 ..	130
RolloTec brightness sensor surface-mounted	184	128

Design	Order no.	PU
polar white glossy	1771 70 09	1
anthracite matt, lacquered	1771 70 06	1
Aluminium, aluminium anodised	* 1771 70 03	1
Stainless steel, metal matt finish	1771 70 04	1



New

RolloTec button comfort

i 886



Suitable for	Order no.	Page
RolloTec inserts		page 121

Design	Order no.	PU
polar white glossy	1770 70 09	1
anthracite matt, lacquered	1770 70 06	1
Aluminium, aluminium anodised	* 1770 70 03	1
Stainless steel, metal matt finish	1770 70 04	1



New

RolloTec memory button for sensors

i 886



Stored "up" and/or "down" time is run daily in automatic operation.

- only for sensor connection to terminal block

Suitable for	Order no.	Page
RolloTec inserts		page 121
optional		
RolloTec glass breakage sensor	170	128
RolloTec adapter for sensors	171	129
RolloTec brightness sensor surface-mounted	184	128
Magnetic contact	9251 0 ..	130
RolloTec brightness sensor	169	128

Design	Order no.	PU
polar white glossy	1757 70 09	1
anthracite matt, lacquered	1757 70 06	1
Aluminium, aluminium anodised	* 1757 70 03	1
Stainless steel, metal matt finish	1757 70 04	1



New

RolloTec memory button

i 886



Stored "up" and/or "down" time is run daily in automatic operation.

Suitable for	Order no.	Page
RolloTec inserts		page 121

Design	Order no.	PU
polar white glossy	1756 70 09	1
anthracite matt, lacquered	1756 70 06	1
Aluminium, aluminium anodised	* 1756 70 03	1
Stainless steel, metal matt finish	1756 70 04	1



RolloTec time switches

New



RolloTec comfort time switch for sensors

i 890

- Display



Number of operation times for up/down

18

- with surface-mounted RolloTec brightness sensor, shutter and lamella position additionally settable
- when a surface-mounted RolloTec brightness sensor is connected, twilight-controlled lowering possible
- RolloTec brightness sensor for sun blind movement up/down can be connected
- lamella position programmable at down operation times
- with automatic summer-/winter time switching (can be switched off)
- with a total of 3 independent programme memories
- 2 programme memories preset
- astro programme for sunrise/sundown switching
- programming according to week and days possible
- programme memory network failure proved

Suitable for	Order no.	Page
RolloTec inserts		page 121
optional		
RolloTec brightness sensor	169	128
RolloTec glass breakage sensor	170	128
RolloTec adapter for sensors	171	129
RolloTec brightness sensor surface-mounted	184	128
Magnetic contact	9251 0 ..	130

Design	Order no.	PU
polar white glossy	1775 70 09	1
anthracite matt, lacquered	1775 70 06	1
aluminium matt, lacquered	* 1775 70 03	1
stainless steel matt, lacquered	1775 70 04	1



New



RolloTec comfort time switch

i 890

- Display



Number of operation times for up/down

18

- lamella position programmable at down operation times
- with automatic summer-/winter time switching (can be switched off)
- with a total of 3 independent programme memories
- 2 programme memories preset
- astro programme for sunrise/sundown switching
- programming according to week and days possible
- programme memory network failure proved

Suitable for	Order no.	Page
RolloTec inserts		page 121

Design	Order no.	PU
polar white glossy	1774 70 09	1
anthracite matt, lacquered	1774 70 06	1
aluminium matt, lacquered	* 1774 70 03	1
stainless steel matt, lacquered	1774 70 04	1



New



RolloTec easy time switch

i 890

- Display



Number of operation times for up/down

2

- 2 programme blocks Mon. - Fri. and Sat. - Sun.
- simple programming of operation times
- with quick programming mode
- programming possible for up to 6 h after removing insert
- with preset basic programme

Suitable for	Order no.	Page
RolloTec inserts		page 121

Design	Order no.	PU
polar white glossy	1762 71 09	1
anthracite matt, lacquered	1762 71 06	1
aluminium matt, lacquered	* 1762 71 03	1
stainless steel matt, lacquered	1762 71 04	1



HVAC controllers and covers

Thermostat

New



Thermostat, NO contact, with centre plate

i 884

- Time-controlled



Rated voltage 230 V~
Frequency 50 Hz
Power consumption ≈ 1.2 W
Lithium cell power reserve [years] ≈ 10

- for floor heating, control using room and/or floor temperature possible
- for heating or cooling mode
- for room and floor heaters
- with self-teaching heating curve

Suitable for	Order no.	Page
Valve drive 230 V	7590 00 76	142
optional		
Temperature sensor	161	150

Design	Order no.	PU
polar white glossy	2044 71 09	1
anthracite matt	2044 71 06	1
aluminium matt, lacquered	*2044 71 03	1
stainless steel, lacquered	2044 71 04	1




New



Thermostat, NO contact, with centre plate, for underfloor heating

i 883

- Rocker switch
- External temperature sensor



Rated voltage 250 V~
Frequency 50/60 Hz

Suitable for	Order no.	Page
Centre plate for thermostat for underfloor heating	1672 71 ..	140
Valve drive 230 V	7590 00 76	142
replacement		
Temperature sensor	161	150

Design	Order no.	PU
polar white glossy	2034 71 09	1
anthracite matt, lacquered	2034 71 06	1
aluminium matt, lacquered	*2034 71 03	1
stainless steel matt, lacquered	2034 71 04	1



New



Temperature controller, change-over contact, with centre plate

i 883

Rated voltage 250 V~
Frequency 50/60 Hz

- for heating or cooling mode

Suitable for	Order no.	Page
Centre plate for thermostat	1670 71 ..	141
Valve drive 230 V	7590 00 76	142

Design	Order no.	PU
polar white glossy	2026 71 09	1
anthracite matt, lacquered	2026 71 06	1
aluminium matt, lacquered	*2026 71 03	1
stainless steel matt, lacquered	2026 71 04	1



New



Temperature controller, NC contact, with centre plate

i 883

- Rocker switch




Rated voltage 250 V~
Frequency 50/60 Hz

Suitable for	Order no.	Page
Centre plate for thermostat	1671 71 ..	141
Valve drive 230 V	7590 00 76	142

Design	Order no.	PU
polar white glossy	2030 71 09	1
anthracite matt, lacquered	2030 71 06	1
aluminium matt, lacquered	*2030 71 03	1
stainless steel matt, lacquered	2030 71 04	1



New



Temperature controller, NC contact, with centre plate, 24 V AC/DC

i 883

- Rocker switch



Rated voltage 24 V~/24 V=
Frequency 50/60 Hz

Suitable for	Order no.	Page
Centre plate for thermostat	1671 71 ..	141
Valve drive 24 V AC/DC	7590 00 77	142

Design	Order no.	PU
polar white glossy	2031 71 09	1
anthracite matt, lacquered	2031 71 06	1
aluminium matt, lacquered	* 2031 71 03	1
stainless steel matt, lacquered	2031 71 04	1




New



Centre plate for thermostat for underfloor heating

- Rocker
- Setting knob



Suitable for	Order no.	Page
Thermostat, NO contact, with centre plate, for underfloor heating	2034 71 ..	136

Design	Order no.	PU
polar white glossy	1672 71 09	1
anthracite matt, lacquered	1672 71 06	1
aluminium matt, lacquered	* 1672 71 03	1
stainless steel matt, lacquered	1672 71 04	1

New



Centre plate for thermostat

- Setting knob



Suitable for	Order no.	Page
Temperature controller, change-over contact, with centre plate	2026 71 ..	137

Design	Order no.	PU
polar white glossy	1670 71 09	1
anthracite matt, lacquered	1670 71 06	1
aluminium matt, lacquered	* 1670 71 03	1
stainless steel matt, lacquered	1670 71 04	1

New



Centre plate for thermostat

- Rocker
- Setting knob



Suitable for	Order no.	Page
Temperature controller, NC contact, with centre plate	2030 71 ..	138
Temperature controller, NC contact, with centre plate, 24 V AC/DC	2031 71 ..	139

Design	Order no.	PU
polar white glossy	1671 71 09	1
anthracite matt, lacquered	1671 71 06	1
aluminium matt, lacquered	* 1671 71 03	1
stainless steel matt, lacquered	1671 71 04	1

Central plates for sensor inserts



Central plate for sensor insert

Not suitable for rocker push-button switches.
Caution!
Use only with intermediate ring for central plate from the corresponding range.
Labelling field cannot be used.


Suitable for	Order no.	Page
Sensor insert	7594 10 01	141

Design	Order no.	PU
polar white glossy	7594 04 09	1
anthracite matt	7594 04 85	1
stainless steel matt, lacquered	7594 04 03	1

Rockers for heating emergency switches

Marked items are only suitable for splash-protected IP44 flush-mounted installation when used in conjunction with the sealing set, order no. 1010 71 00.

Rocker with imprint "Heizung Notschalter"



- Red lens



Or use glass pane-protected heating emergency switch from programme ranges Arsys, flush-mounted splash-protected IP44, Aquatec IP44.

Not suitable for heating systems > 50 kW.

- for monitoring circuit
- also for KNX applications: push-button, 1gang, and group push-button, 1gang

Suitable for	Order no.	Page
Rocker switches		page 20
Rocker push-buttons		page 20
optional		
Sealing set for switches/push-buttons	1010 71 00	337

Design	Order no.	PU
red glossy	1488 71 15	10

Centre plates for air conditioner/fan controllers

Marked items are only suitable for splash-protected IP44 flush-mounted installation when used in conjunction with the sealing set, order no. 1010 72 00.



Centre plate with rotary knob for 3-step switch

Design

without 0-position, imprint 2-1-3

Design	Order no.	Page
polar white glossy	1088 71 09	1
anthracite matt, lacquered	1088 71 06	1
Aluminium, aluminium anodised	* 1088 71 03	1
Stainless steel, metal matt finish	1088 71 04	1

with 0-position, imprint 0-1-2-3

polar white glossy	1087 71 09	1
anthracite matt, lacquered	1087 71 06	1
Aluminium, aluminium anodised	* 1087 71 03	1
Stainless steel, metal matt finish	1087 71 04	1



Centre plate for speed controller

- Setting knob



Axis dimension Ø 4 mm

- with imprinted symbol curve

Suitable for	Order no.	Page
Speed controllers	2968 01	147
optional		
Sealing set for socket outlets/centre plates	1010 72 00	336

Design	Order no.	PU
polar white glossy	1135 72 09	10
anthracite matt, lacquered	1135 72 06	10
Aluminium, aluminium anodised	* 1135 72 03	10
Stainless steel, metal matt finish	1135 72 04	10

Communication/multimedia technology

– For information on suitable third-party manufacturer articles, see the chapter “Communication/multimedia technology”

Covers data-/telecommunication

New



Centre plate with TAE cut-out

– also for KNX applications: USB data interface, flush-mounted

Suitable for	Order no.	Page
230 V USB charging socket outlet	2600 0 ..	173
Loudspeaker connection box	4572 0 ..	174
Stereo loudspeaker connection box	4573 0 ..	174
Modular UAE socket outlet 8/8pole unshielded, cat.6A iso	4584	163
Modular UAE socket outlet 8/8pole shielded, cat.6A iso	4588	162

Design	Order no.	PU
polar white glossy	1035 70 09	10
anthracite matt, lacquered	1035 70 06	10
Aluminium, aluminium anodised	* 1035 70 03	10
Stainless steel, metal matt finish	1035 70 04	10

New



Centre plate for FCC socket outlet

– for 1gang socket outlet, cat.3, cat.5e and cat.6_A iso
– with 45° oblique outlet

Suitable for	Order no.	Page
UAE socket outlets 1gang		page 157

Design	Order no.	PU
polar white glossy	1407 70 09	10
anthracite matt, lacquered	1407 70 06	10
Aluminium, aluminium anodised	* 1407 70 03	10
Stainless steel, metal matt finish	1407 70 04	10



Central plate for FCC socket outlet

Caution!
Use only with intermediate ring for central plate from the corresponding range.

– for 1gang socket outlet, cat.3, cat.5e and cat.6_A iso
– with 45° oblique outlet
– labelling field latchable

Suitable for	Order no.	Page
UAE socket outlets 1gang		page 157

Design	Order no.	PU
polar white glossy	1468 09	10

New



Centre plate for FCC socket outlet 2gang

– for 2gang socket outlet, cat.3, cat.5e and cat.6_A iso
– with 45° oblique outlet

Suitable for	Order no.	Page
UAE socket outlets 2gang		page 160

Design	Order no.	PU
polar white glossy	1409 70 09	10
anthracite matt, lacquered	1409 70 06	10
Aluminium, aluminium anodised	* 1409 70 03	10
Stainless steel, metal matt finish	1409 70 04	10



Central plate for FCC socket outlet 2gang

Caution!
Use only with intermediate ring for central plate from the corresponding range.

– for 2gang socket outlet, cat.3, cat.5e and cat.6_A iso
– with 45° oblique outlet
– labelling field latchable

Suitable for	Order no.	Page
UAE socket outlets 2gang		page 160

Design	Order no.	PU
polar white glossy	1469 09	10

New



Centre plate with dust protection slider

- Labelling field



Labelling field height arranged for P-touch strips 6 mm.

- for supporting plates with coloured mounting device, 1gang, order no. 4540 ..., see COMMUNICATION/MULTIMEDIA TECHNOLOGY

Design	Order no.	PU
polar white glossy	1170 70 09	10
anthracite matt, lacquered	1170 70 06	10
aluminium matt, lacquered	* 1170 70 03	10
stainless steel matt, lacquered	1170 70 04	10

New



Centre plate with 2 dust protection sliders


- Labelling field



Labelling field height arranged for P-touch strips 6 mm.

- for supporting plates with coloured mounting devices, 2gang, order no. 4541 ..., see COMMUNICATION/MULTIMEDIA TECHNOLOGY

Design	Order no.	PU
polar white glossy	1182 70 09	10
anthracite matt, lacquered	1182 70 06	10
aluminium matt, lacquered	* 1182 70 03	10
stainless steel matt, lacquered	1182 70 04	10



Central plate for 3 MINI-COM modules

Caution!
Use only with intermediate ring for central plate from the corresponding range.

- with 30° oblique outlet
- for Mini-Com jacks cat.3, cat.5e, cat.6, cat.6 10Gig
- for Mini-Com fibre-optic modules
- for Mini-Com 3.5 mm stereo connection/coupling modules
- for Mini-Com BNC connector modules
- for Mini-Com Cinch connection/coupling modules
- for Mini-Com D-Subminiature connectors 15pole
- for Mini-Com F-plug coupling modules
- for Mini-Com speaker wire/banana plug modules
- for Mini-Com HDMI™ module, double socket 1.3, type A
- for Mini-Com S-Video connection/coupling modules
- for Mini-Com USB modules, double socket type A, USB 2.0 compliant
- labelling field latchable
- for Mini-Com dummy modules 1gang

Design	Order no.	PU
polar white glossy	1427 09	10
anthracite matt	1427 16 06	10

Suitable for Multimedia modules Order no. Page page 571




Central plate for Reichle&De-Massari single modules

Caution!
Use only with intermediate ring for central plate from the corresponding range.

- with 30° oblique outlet
- for fibre-optic modules
- for connecting modules RJ45 cat.5e and cat.6
- labelling field latchable

Design	Order no.	PU
polar white glossy	1472 09	10
anthracite matt	1472 16 06	10




Central plate for Reichle&De-Massari double module

Caution!
Use only with intermediate ring for central plate from the corresponding range.

- with 30° oblique outlet
- for fibre-optic modules
- for connecting modules RJ45 cat.5e and cat.6
- labelling field latchable

Design	Order no.	PU
polar white glossy	1461 09	10




Central plate 2gang for AMP jacks

Indexing dimension (W x H) ≈ 14.7 x 20.7 mm

Caution!
Use only with intermediate ring for central plate from the corresponding range.

- with 30° oblique outlet
- for AMP fibre-optic couplings MT-RJ jacks
- for AMP modular jacks series 110 Connect cat.3, cat.5, cat.5e and cat.6
- labelling field latchable

Design	Order no.	PU
polar white glossy	1463 09	10
anthracite matt	1463 16 06	10



Central plate 2gang for Krone jacks

Indexing dimension (W x H) ≈ 14.7 x 19.4 mm

Caution!
Use only with intermediate ring for central plate from the corresponding range.

- with 30° oblique outlet
- for 3M fibre-optic couplings Volition
- for Krone fibre-optic couplings MT-RJ jacks
- for Krone modular jacks cat.5, cat.5e and cat.6

Design	Order no.	PU
polar white glossy	1464 09	10
anthracite matt	1464 16 06	10



Central plate for fibre-optic couplings Simplex ST

Caution!
Use only with intermediate ring for central plate from the corresponding range.

- with 30° oblique outlet
- for 2 fibre-optic couplings

Design	Order no.	PU
polar white glossy, 2gang	1492 09	10



Central plate for fibre-optic couplings Duplex SC

Caution!
Use only with intermediate ring for central plate from the corresponding range.

- with 30° oblique outlet
- for 1 or 2 fibre-optic couplings
- 1 knock out opening

Design	Order no.	PU
polar white glossy	1480 09	10

Covers for aerial sockets

New



Centre plate for aerial socket 2-/3hole

- with knock out SAT input

Design	Suitable for	Order no.	Page
	Aerial sockets		page 154
polar white glossy		1201 70 19	10
anthracite matt, lacquered		1201 70 16	10
Aluminium, aluminium anodised		* 1201 70 13	10
Stainless steel, metal matt finish		1201 70 14	10

	Central plate for aerial socket 4hole (Ankaro)		
	Caution! Use only with intermediate ring for central plate from the corresponding range.		
			- with 2 additional SAT outputs (F-sockets)
	Suitable for	Order no.	Page
	Aerial socket 4hole single box	4594	156
Design		Order no.	PU
polar white glossy		1484 09	10
anthracite matt		1484 16 06	10
aluminium matt, lacquered		* 1484 70 03	10
stainless steel matt, lacquered		1484 04	10

	Central plate for aerial socket 4hole (Hirschmann)		
	Caution! Use only with intermediate ring for central plate from the corresponding range.		
			- with 2 additional SAT outputs (F-sockets)
	Design	Order no.	PU
	polar white glossy	1483 09	10
anthracite matt		1483 16 06	10
aluminium matt, lacquered		* 1483 70 03	10
stainless steel matt, lacquered		1483 04	10

	Central plate for broadband modem socket (Wisi)		
	Caution! Use only with intermediate ring for central plate from the corresponding range.		
			- with additional multimedia output
	Design	Order no.	PU
	polar white glossy	# 1439 09	10
anthracite matt		# 1439 16 06	10

Central plates for signalling and command units

	Central plate with installation opening Ø 18.8 mm		
	Screw spacing	36 mm	- with cut-out dia. 18.8 mm - labelling field latchable
	Caution! Use only with intermediate ring for central plate from the corresponding range.		
	Suitable for	Order no.	Page
	optional Built-in socket for floating output	4604 ..	671
Design		Order no.	PU
polar white glossy		1431 09	10
anthracite matt		1431 16 06	10
stainless steel matt, lacquered		1431 04	10

	Central plate with installation opening Ø 22.5 mm		
	Screw spacing	36 mm	- with cut-out dia. 22.5 mm - labelling field latchable
	Caution! Use only with intermediate ring for central plate from the corresponding range. Installation aperture according to IEC 60947-5-1		
	Design	Order no.	PU
	polar white glossy	1432 09	10
anthracite matt		1432 16 06	10
stainless steel matt, lacquered		1432 04	10

Covers Audio

New


Centre plate for loudspeaker socket outlet



- 1 knock out opening

Suitable for	Order no.	Page
Stereo loudspeaker socket outlet	4505 01	175
Loudspeaker socket outlet High End	4505 02	175
Entry for small connector	4505	176

Design	Order no.	PU
polar white glossy	1184 70 09	10
anthracite matt, lacquered	1184 70 06	10
Aluminium, aluminium anodised	* 1184 70 03	10
Stainless steel, metal matt finish	1184 70 04	10



Central plate for XLR D-series connector

Cut-out Ø 23.6 mm - speakon and jack connector
Screw spacing (horizontal/vertical) 19/24 mm - labelling field latchable

Caution!
Use only with intermediate ring for central plate from the corresponding range.

Design	Order no.	PU
polar white glossy	1412 09	10
anthracite matt	1412 16 06	10

Video socket outlets

New

VGA socket outlet

i 912



Frequency range video max. 160 MHz - with 15pole D-subminiature double jack
Resolution max. 1280 x 1024 px - S-VGA compatible
- with 15pole D-subminiature jack (front)

Design	Order no.	PU
with double jack		
polar white glossy	33 1540 70 09	10
anthracite matt, lacquered	33 1540 70 06	10
aluminium matt, lacquered	* 33 1540 70 03	10
stainless steel matt, lacquered	33 1540 70 04	10
back side, with screw-in lift terminals		
polar white glossy ¹⁾	33 1541 70 09	10
anthracite matt, lacquered ¹⁾	33 1541 70 06	10
aluminium matt, lacquered ¹⁾	* 33 1541 70 03	10
stainless steel matt, lacquered ¹⁾	33 1541 70 04	10

¹⁾ for connection to a 15-core VGA cable, conductor cross-section (rigid) max. 1.5 mm²

Multimedia sockets

New

3 x Cinch/S-Video socket outlet



i 915





Frequency range audio 20 ... 20000 Hz - gold-plated contacts
Frequency range video max. 160 MHz - 1 cinch double jack for video connection (yellow)
- 2 cinch double jacks for audio connection (red, white)
- S-Video double jack




Design	Order no.	PU
polar white glossy	33 1532 70 09	10
anthracite matt, lacquered	33 1532 70 06	10
aluminium matt, lacquered	* 33 1532 70 03	10
stainless steel matt, lacquered	33 1532 70 04	10





	<p>High definition socket outlet i 915</p> <p>Transmission rate max. 8.16 Gbit/s Resolution max. 1920 x 1080 px</p> <ul style="list-style-type: none"> - gold-plated contacts - with HDMI™ double jack type A, supports HDMI™ technology (V 1.3 with Deep Color) 																																	
	<table border="0" style="width: 100%;"> <tr> <td style="width: 50%;">Design</td> <td style="width: 30%;">Order no.</td> <td style="width: 20%; text-align: right;">PU</td> </tr> <tr> <td colspan="3">back side, with straight socket</td> </tr> <tr> <td>polar white glossy</td> <td>33 1542 70 09</td> <td style="text-align: right;">10</td> </tr> <tr> <td>anthracite matt, lacquered</td> <td>33 1542 70 06</td> <td style="text-align: right;">10</td> </tr> <tr> <td>aluminium matt, lacquered</td> <td>* 33 1542 70 03</td> <td style="text-align: right;">10</td> </tr> <tr> <td>stainless steel matt, lacquered</td> <td>33 1542 70 04</td> <td style="text-align: right;">10</td> </tr> <tr> <td colspan="3">back side, with 90° angle socket</td> </tr> <tr> <td>polar white glossy</td> <td>33 1543 70 09</td> <td style="text-align: right;">10</td> </tr> <tr> <td>anthracite matt, lacquered</td> <td>33 1543 70 06</td> <td style="text-align: right;">10</td> </tr> <tr> <td>aluminium matt, lacquered</td> <td>* 33 1543 70 03</td> <td style="text-align: right;">10</td> </tr> <tr> <td>stainless steel matt, lacquered</td> <td>33 1543 70 04</td> <td style="text-align: right;">10</td> </tr> </table>	Design	Order no.	PU	back side, with straight socket			polar white glossy	33 1542 70 09	10	anthracite matt, lacquered	33 1542 70 06	10	aluminium matt, lacquered	* 33 1542 70 03	10	stainless steel matt, lacquered	33 1542 70 04	10	back side, with 90° angle socket			polar white glossy	33 1543 70 09	10	anthracite matt, lacquered	33 1543 70 06	10	aluminium matt, lacquered	* 33 1543 70 03	10	stainless steel matt, lacquered	33 1543 70 04	10
Design	Order no.	PU																																
back side, with straight socket																																		
polar white glossy	33 1542 70 09	10																																
anthracite matt, lacquered	33 1542 70 06	10																																
aluminium matt, lacquered	* 33 1542 70 03	10																																
stainless steel matt, lacquered	33 1542 70 04	10																																
back side, with 90° angle socket																																		
polar white glossy	33 1543 70 09	10																																
anthracite matt, lacquered	33 1543 70 06	10																																
aluminium matt, lacquered	* 33 1543 70 03	10																																
stainless steel matt, lacquered	33 1543 70 04	10																																

	<p>USB/3.5 mm audio socket outlet i 915</p> <p>USB transmission rate max. 480 Mbit/s Frequency range audio 20 ... 20000 Hz</p> <ul style="list-style-type: none"> - double jack gold-plated 3.5 mm, stereo - USB double jack type A, USB 2.0 capable 															
	<table border="0" style="width: 100%;"> <tr> <td style="width: 50%;">Design</td> <td style="width: 30%;">Order no.</td> <td style="width: 20%; text-align: right;">PU</td> </tr> <tr> <td>polar white glossy</td> <td>33 1539 70 09</td> <td style="text-align: right;">10</td> </tr> <tr> <td>anthracite matt, lacquered</td> <td>33 1539 70 06</td> <td style="text-align: right;">10</td> </tr> <tr> <td>aluminium matt, lacquered</td> <td>* 33 1539 70 03</td> <td style="text-align: right;">10</td> </tr> <tr> <td>stainless steel matt, lacquered</td> <td>33 1539 70 04</td> <td style="text-align: right;">10</td> </tr> </table>	Design	Order no.	PU	polar white glossy	33 1539 70 09	10	anthracite matt, lacquered	33 1539 70 06	10	aluminium matt, lacquered	* 33 1539 70 03	10	stainless steel matt, lacquered	33 1539 70 04	10
Design	Order no.	PU														
polar white glossy	33 1539 70 09	10														
anthracite matt, lacquered	33 1539 70 06	10														
aluminium matt, lacquered	* 33 1539 70 03	10														
stainless steel matt, lacquered	33 1539 70 04	10														

Consumer electronics

	<p>Berker Radio Touch</p> <p>- Loudspeaker </p> <ul style="list-style-type: none"> - stereo FM radio with RDS display - operation via sensor areas of the touch display - illuminated touch graphics display - time and date display - with one loudspeaker - extension unit input for separate on/off switching - external audio input, e.g. for MP3 player or docking station 																																																				
	<table border="0" style="width: 100%;"> <tr> <td style="width: 50%;">Operating voltage</td> <td style="width: 20%;">230 V~</td> <td style="width: 20%;"></td> <td style="width: 10%;"></td> </tr> <tr> <td>Frequency</td> <td>50/60 Hz</td> <td></td> <td></td> </tr> <tr> <td>Frequency range</td> <td>87.5 ... 108 MHz</td> <td></td> <td></td> </tr> <tr> <td>Dimensions of display (W x H)</td> <td>35 x 28 mm</td> <td></td> <td></td> </tr> <tr> <td>Insertion depth</td> <td>33 mm</td> <td></td> <td></td> </tr> <tr> <td>Conductor cross-section</td> <td>max. 2.5 mm²</td> <td>Suitable for optional</td> <td>Order no.</td> </tr> <tr> <td></td> <td></td> <td>Loudspeaker</td> <td style="text-align: right;">Page</td> </tr> <tr> <td></td> <td></td> <td>Docking station</td> <td style="text-align: right;">page 388</td> </tr> <tr> <td></td> <td></td> <td></td> <td style="text-align: right;">page 389</td> </tr> <tr> <td>Design</td> <td></td> <td>Order no.</td> <td style="text-align: right;">PU</td> </tr> <tr> <td>polar white glossy</td> <td></td> <td>2880 70 09</td> <td style="text-align: right;">1</td> </tr> <tr> <td>aluminium matt, lacquered</td> <td></td> <td>* 2880 70 03</td> <td style="text-align: right;">1</td> </tr> <tr> <td>stainless steel matt, lacquered</td> <td></td> <td>2880 70 04</td> <td style="text-align: right;">1</td> </tr> </table>	Operating voltage	230 V~			Frequency	50/60 Hz			Frequency range	87.5 ... 108 MHz			Dimensions of display (W x H)	35 x 28 mm			Insertion depth	33 mm			Conductor cross-section	max. 2.5 mm ²	Suitable for optional	Order no.			Loudspeaker	Page			Docking station	page 388				page 389	Design		Order no.	PU	polar white glossy		2880 70 09	1	aluminium matt, lacquered		* 2880 70 03	1	stainless steel matt, lacquered		2880 70 04	1
Operating voltage	230 V~																																																				
Frequency	50/60 Hz																																																				
Frequency range	87.5 ... 108 MHz																																																				
Dimensions of display (W x H)	35 x 28 mm																																																				
Insertion depth	33 mm																																																				
Conductor cross-section	max. 2.5 mm ²	Suitable for optional	Order no.																																																		
		Loudspeaker	Page																																																		
		Docking station	page 388																																																		
			page 389																																																		
Design		Order no.	PU																																																		
polar white glossy		2880 70 09	1																																																		
aluminium matt, lacquered		* 2880 70 03	1																																																		
stainless steel matt, lacquered		2880 70 04	1																																																		

	<p>Loudspeaker</p> <p>Insertion depth 22.5 mm Pre-assembled cable ≈ 0.3 m Conductor cross-section (flexible) 0.75 mm²</p> <ul style="list-style-type: none"> - confectioned, with 2-core, double-insulated, flexible cable 																
	<table border="0" style="width: 100%;"> <tr> <td style="width: 50%;">Design</td> <td style="width: 30%;">Order no.</td> <td style="width: 20%;"></td> <td style="width: 10%; text-align: right;">PU</td> </tr> <tr> <td>polar white glossy</td> <td>2882 70 09</td> <td></td> <td style="text-align: right;">1</td> </tr> <tr> <td>aluminium matt, lacquered</td> <td>* 2882 70 03</td> <td></td> <td style="text-align: right;">1</td> </tr> <tr> <td>stainless steel matt, lacquered</td> <td>2882 70 04</td> <td></td> <td style="text-align: right;">1</td> </tr> </table>	Design	Order no.		PU	polar white glossy	2882 70 09		1	aluminium matt, lacquered	* 2882 70 03		1	stainless steel matt, lacquered	2882 70 04		1
Design	Order no.		PU														
polar white glossy	2882 70 09		1														
aluminium matt, lacquered	* 2882 70 03		1														
stainless steel matt, lacquered	2882 70 04		1														

New



Docking station

Operating voltage	230 V~	- with 30pole plug connector for iPod and iPhone*
Frequency	50/60 Hz	- buttons for volume control
Output voltage	max. 3.5 V	- AUX input mini stereo jack for audio source (line or headphones output), e.g. MP3 player
Number of loudspeakers (4 Ω)	1	- stereo Line-Out for connection to the radio touch
Number of loudspeakers (8 Ω)	2	
Number of loudspeakers (20 Ω)	5	
Insertion depth	36 mm	

* iPod and iPhone are registered trademarks of Apple Inc.

Suitable for	Order no.	Page
Berker Radio Touch		page 388
Loudspeaker		page 388


Design	Order no.	PU
polar white glossy	2883 70 09	1
aluminium matt, lacquered	* 2883 70 03	1
stainless steel matt, lacquered	2883 70 04	1



Covers for pilot lamps

Marked items are only suitable for splash-protected IP44 flush-mounted installation when used in conjunction with the sealing set, order no. 1010 72 00.

New



Centre plate for push-button/pilot lamp E10

Cut-out Ø	27.2 mm	- centre plate for plug-in fixing
-----------	---------	-----------------------------------

Suitable for	Order no.	Page
Covers and push-buttons		page 71
LED lamp E10		page 70
Neon lamp E10		page 71
Push-button/pilot lamp E10, NO contact	5101 ..	63

Design	Order no.	PU
polar white glossy	1165 70 09	10
anthracite matt, lacquered	1165 70 06	10
aluminium matt, lacquered	* 1165 70 03	10
stainless steel matt, lacquered	1165 70 04	10

New



Centre plate for pilot lamp E14

Suitable for	Order no.	Page
Covers and push-buttons		page 71
LED lamp E14		page 71
Incandescent lamp E14		page 71
Pilot lamp E14	5131 02	65
optional		
Sealing set for socket outlets/centre plates	1010 72 00	336

Design	Order no.	PU
polar white glossy	1167 70 09	10
anthracite matt, lacquered	1167 70 06	10
aluminium matt, lacquered	* 1167 70 03	10
stainless steel matt, lacquered	1167 70 04	10

New



Cover for LED orientation/signal light

- with printed label sheets "Bitte warten/Bitte eintreten" and "Do not disturb/make up room"
- with milky foil, for individual labelling

Suitable for	Order no.	Page
LED signal light	2952	66
LED orientation light	2951	66

Design	Order no.	PU
polar white glossy	1248 70 09	1
anthracite matt, lacquered	1248 70 06	1
aluminium matt, lacquered	* 1248 70 03	1
stainless steel matt, lacquered	1248 70 04	1

Blind plates



Marked items are only suitable for splash-protected IP44 flush-mounted installation when used in conjunction with the sealing set, order no. 1010 72 00.

New



Blind plug with centre plate



– on supporting plate without cut-out

Design

Order no.

PU

without spreader claws

Design	Order no.	Page
polar white glossy	1045 70 09	20
anthracite matt, lacquered	1045 70 06	20
Aluminium, aluminium anodised	* 1045 70 03	20
Stainless steel, metal matt finish	1045 70 04	20

with base and spreader claws


polar white glossy	67 1045 70 09	10
anthracite matt, lacquered	67 1045 70 06	10
Aluminium, aluminium anodised	* 67 1045 70 03	10
Stainless steel, metal matt finish	67 1045 70 04	10

Suitable for optional

Order no.

Page

Sealing set for socket outlets/centre plates 1010 72 00 336



Blind plug with centre plate, screw-on

- on supporting plate with large cut-out
- with cover plug for screw fitting
- without spreader claws
- for customised cut-outs or holes when installing special solutions
- space-saving for relays, etc.

Design

Order no.

PU

polar white glossy	1045 71 09	20
anthracite matt, lacquered	1045 71 06	20

Suitable for optional

Order no.

Page

Sealing set for socket outlets/centre plates 1010 72 00 336

New



Centre plate for cable outlet

Design

Order no.

PU

polar white glossy	1005 70 09	10
anthracite matt, lacquered	1005 70 06	10
aluminium matt, lacquered	* 1005 70 03	10
stainless steel matt, lacquered	1005 70 04	10

Suitable for

Order no.

Page

Cable outlet with low installation depth 4468 171

Cable outlet 4470 170

Intermediate rings

New



Adapter ring for centre plate 50 x 50 mm

Caution!
Not suitable for Berker central plates.
For centre plate as per according to DIN 49075


– for other centre plates with external size 50 x 50 mm


Design


Order no.

PU

polar white glossy	1108 71 09	10
anthracite matt, lacquered	1108 71 06	10
aluminium matt, lacquered	* 1108 71 03	10
stainless steel matt, lacquered	1108 71 04	10



New		Intermediate ring for central plate				
				– labelling field latchable		
			Suitable for optional		Order no.	Page
			Labelling field for intermediate ring		1905 00 69	226
		Design	Order no.			PU
		polar white glossy	1108 70 09			10
	anthracite matt, lacquered	1108 70 06		10		
	aluminium matt, lacquered	* 1108 70 03		10		
	stainless steel matt, lacquered	1108 70 04		10		

New		Labelling field for intermediate ring				
		Labelling field height arranged for P-touch strips 6 mm.				
			Suitable for		Order no.	Page
			Intermediate ring for central plate		1108 ..	443
			Intermediate ring for central plate		1109 ..	291
		Design	Order no.			PU
	polar white glossy	1905 00 69		10		
	aluminium matt, lacquered	* 1905 70 03		10		
	stainless steel matt, lacquered	1905 70 04		10		

New		Intermediate ring with hinged cover			
		Labelling field height arranged for P-touch strips 6 mm.		– when opening hinged cover, it can be arrested in end position	
				– with imprint	
				– for other centre plates with external size 50 x 50 mm	
		Design	Order no.		PU
		polar white glossy ¹⁾	1154 71 09		10
	anthracite matt, lacquered ¹⁾	1154 71 06		10	
	Aluminium aluminium anodised ¹⁾	* 1154 71 03		10	
	Stainless steel/metal matt finish ¹⁾	1154 71 04		10	

Hotel applications

Centre plates for hotel card switches

New		Centre plate with imprint for push-button for hotel card					
		- Red lens		– for push-button for hotel card			
					Suitable for	Order no.	Page
			Card width	max. 54 mm	Push-button for hotel card		page 76
			Card thickness	0.5 ... 1.4 mm			
			Other imprint on request!				
Design	Order no.				PU		
	polar white glossy	1641 71 09			10		
	anthracite matt, lacquered	1641 71 06			10		
	aluminium matt, lacquered	* 1641 71 03			10		
	stainless steel matt, lacquered	1641 71 04			10		

Barrier-free construction



The following rockers are conformant with DIN 18024-2 and DIN 18025-1 and -2.

SCHUKO socket outlets



SCHUKO socket outlet with hinged cover for barrier-free construction

i 853

- Tactile symbol
- enhanced contact protection

- when opening hinged cover, it can be arrested in end position
- for barrier-free construction
- with plug-in terminals



Rated voltage 250 V~
Rated current 16 A

Connection terminals according to IEC 60884-1
Barrier-free building based on based on DIN 18025



Design	Order no.	PU
polar white glossy	4786 71 09	10

Rockers - barrier-free construction

Marked items are only suitable for splash-protected IP44 flush-mounted installation when used in conjunction with the sealing set, order no. 1010 71 00.



Rocker for barrier-free construction

- Guide for mouth rod
- Lens

- for illumination and monitoring circuit
- for change-over/intermediate switch
- for rocker push-buttons
- also for KNX applications: push-button, 1gang, and group push-button, 1gang
- for barrier-free construction



The IP44 degree of protection can only be achieved in conjunction with the appropriate neon, incandescent or LED lamp unit, as well as a sealing set for switches/push-buttons.

Lenses with symbol for light, bell, door and neutral in clear, also neutral in red transparent.

Barrier-free building based on based on DIN 18025

Suitable for	Order no.	Page
Rocker switches		page 20
Rocker push-buttons		page 20
optional		
Sealing set for switches/push-buttons	1010 71 00	337

Design	Order no.	PU
polar white glossy	1661 71 09	10



Rocker for barrier-free construction

- Tactile light symbol
- Red lens

- for illumination and monitoring circuit
- for change-over/intermediate switch
- for rocker push-buttons
- also for KNX applications: push-button, 1gang, and group push-button, 1gang
- for barrier-free construction





The IP44 degree of protection can only be achieved in conjunction with the appropriate neon, incandescent or LED lamp unit, as well as a sealing set for switches/push-buttons.



Not suitable for rocker push-button switches.

Barrier-free building based on based on DIN 18025

Suitable for	Order no.	Page
Rocker switches		page 20
Rocker push-buttons		page 20
optional		
Sealing set for switches/push-buttons	1010 71 00	337


Design	Order no.	PU
polar white glossy	1651 71 09	10


Rocker for barrier-free construction													
	<ul style="list-style-type: none"> - Tactile bell symbol - Red lens 	<ul style="list-style-type: none"> - for illuminated rocker push-buttons - also for KNX applications: push-button, 1gang - for barrier-free construction 											
	 <p>The IP44 degree of protection can only be achieved in conjunction with the appropriate neon, incandescent or LED lamp unit, as well as a sealing set for switches/push-buttons.</p> <p>Barrier-free building based on based on DIN 18025</p>	<table border="0"> <tr> <td>Suitable for</td> <td>Order no.</td> <td>Page</td> </tr> <tr> <td>Rocker push-buttons</td> <td></td> <td>page 20</td> </tr> <tr> <td>optional</td> <td></td> <td></td> </tr> <tr> <td>Sealing set for switches/push-buttons</td> <td>1010 71 00</td> <td>337</td> </tr> </table>	Suitable for	Order no.	Page	Rocker push-buttons		page 20	optional			Sealing set for switches/push-buttons	1010 71 00
Suitable for	Order no.	Page											
Rocker push-buttons		page 20											
optional													
Sealing set for switches/push-buttons	1010 71 00	337											
Design	Order no.	PU											
polar white glossy	1651 72 09	10											

Rocker for barrier-free construction													
	<ul style="list-style-type: none"> - Tactile symbol for door opener - Red lens 	<ul style="list-style-type: none"> - for illuminated rocker push-buttons - also for KNX applications: push-button, 1gang - for barrier-free construction 											
	 <p>The IP44 degree of protection can only be achieved in conjunction with the appropriate neon, incandescent or LED lamp unit, as well as a sealing set for switches/push-buttons.</p> <p>Barrier-free building based on based on DIN 18025</p>	<table border="0"> <tr> <td>Suitable for</td> <td>Order no.</td> <td>Page</td> </tr> <tr> <td>Rocker push-buttons</td> <td></td> <td>page 20</td> </tr> <tr> <td>optional</td> <td></td> <td></td> </tr> <tr> <td>Sealing set for switches/push-buttons</td> <td>1010 71 00</td> <td>337</td> </tr> </table>	Suitable for	Order no.	Page	Rocker push-buttons		page 20	optional			Sealing set for switches/push-buttons	1010 71 00
Suitable for	Order no.	Page											
Rocker push-buttons		page 20											
optional													
Sealing set for switches/push-buttons	1010 71 00	337											
Design	Order no.	PU											
polar white glossy	1651 73 09	10											

Hospital installation

Emergency system

Emergency call set with frame																									
	<p>Operating voltage 24 V=</p> <p>Operating temperature -5 ... +40 °C</p>	<ul style="list-style-type: none"> - acoustic and visual signalling of an emergency call using pilot lamp after the pullcord push-button has been actuated - switch-off of emergency call using shut-off push-button at emergency location - power supply via power supply unit with 24 V AC - acoustic call tone switchable on pilot lamp - call tone can be set as continuous signal or as pulses - centre plates for plug-in fixing - monitoring of devices triggering calls for wire break - with screw terminals 																							
	<p>Set consisting of:</p> <ul style="list-style-type: none"> - Pullcord with frame, order no. 5202.. - Pilot lamp with frame, order no. 5203.. - Shut-off push-button with frame, order no. 5201.. - Power supply with frame, order no. 5204.. <p>For installation in standard wall boxes according to according to DIN 49073-1</p> <p>The emergency call set is used to call for help in public or disabled WCs, doctors' surgeries and old people's homes. It corresponds to the safety requirements according to DIN VDE 0834</p>	<table border="0"> <tr> <td>Suitable for</td> <td>Order no.</td> <td>Page</td> </tr> <tr> <td>optional</td> <td></td> <td></td> </tr> <tr> <td>Cancellation/presence button with frame</td> <td>5205 70 09</td> <td>395</td> </tr> <tr> <td>Call button with frame</td> <td>5206 70 09</td> <td>394</td> </tr> <tr> <td>Pull button with frame</td> <td>5202 70 09</td> <td>395</td> </tr> <tr> <td>Light signal with frame</td> <td>5203 70 09</td> <td>395</td> </tr> <tr> <td>Cancellation button with frame</td> <td>5201 70 09</td> <td>395</td> </tr> <tr> <td>Mains adapter with frame</td> <td>5204 70 09</td> <td>395</td> </tr> </table>	Suitable for	Order no.	Page	optional			Cancellation/presence button with frame	5205 70 09	395	Call button with frame	5206 70 09	394	Pull button with frame	5202 70 09	395	Light signal with frame	5203 70 09	395	Cancellation button with frame	5201 70 09	395	Mains adapter with frame	5204 70 09
Suitable for	Order no.	Page																							
optional																									
Cancellation/presence button with frame	5205 70 09	395																							
Call button with frame	5206 70 09	394																							
Pull button with frame	5202 70 09	395																							
Light signal with frame	5203 70 09	395																							
Cancellation button with frame	5201 70 09	395																							
Mains adapter with frame	5204 70 09	395																							
Design	Order no.	PU																							
polar white glossy	* 5200 70 09	1																							

Call button with frame							
	<p>Operating voltage 24 V=</p> <p>Operating temperature -5 ... +40 °C</p>	<ul style="list-style-type: none"> - as expansion for the emergency call set - with quiet lamp - with red call button with lens - centre plate for plug-in fixing - with screw terminals 					
	<p>Additional call push-button to, for example, provide a control section in a second room or an additional location to trigger an emergency call.</p> <p>For installation in standard wall boxes according to according to DIN 49073-1</p>	<table border="0"> <tr> <td>Suitable for</td> <td>Order no.</td> <td>Page</td> </tr> <tr> <td>Emergency call set with frame</td> <td>5200 70 09</td> <td>394</td> </tr> </table>	Suitable for	Order no.	Page	Emergency call set with frame	5200 70 09
Suitable for	Order no.	Page					
Emergency call set with frame	5200 70 09	394					
Design	Order no.	PU					
polar white glossy	* 5206 70 09	1					

New



Cancellation/presence button with frame

Operating voltage 24 V=
Operating temperature -5 ... +40 °C
Cable length to light signal max. 500 m

Office unit, in order to, for example, indicate an emergency call in an office or a headquarters.

For installation in standard wall boxes according to according to DIN 49073-1

- as expansion for the emergency call set
- with yellow shut-off button
- with green presence button
- with visual and acoustic alarm encoder
- centre plate for plug-in fixing
- with screw terminals

Suitable for Emergency call set with frame **Order no.** 5200 70 09 **Page** 394

Design Order no. PU
polar white glossy *** 5205 70 09** 1

New



Pull button with frame

Operating voltage 24 V=
Operating temperature -5 ... +40 °C

To trigger an emergency call in emergency situations.
For installation in standard wall boxes according to according to DIN 49073-1

- with quiet lamp
- centre plate for plug-in fixing
- for wall and ceiling mounting
- with pullcord and knob
- with screw terminals

Suitable for Emergency call set with frame **Order no.** 5200 70 09 **Page** 394

Design Order no. PU
polar white glossy *** 5202 70 09** 1

New



Cancellation button with frame

Operating voltage 24 V=
Operating temperature -5 ... +40 °C

To switch off the alarm signal (pilot lamp) on arrival at the emergency location.

For installation in standard wall boxes according to according to DIN 49073-1

Suitable for Emergency call set with frame **Order no.** 5200 70 09 **Page** 394

Design Order no. PU
polar white glossy *** 5201 70 09** 1

New



Light signal with frame

Operating voltage 24 V=
Operating temperature -5 ... +40 °C

For visual and acoustic alarms in emergency situations.
Caution:
Always install the device in a clearly visible location.
Recommendation: use deep box.

For installation in standard wall boxes according to according to DIN 49073-1

- with 4 red LEDs
- acoustic call tone switchable on pilot lamp
- call tone can be set as continuous signal or as pulses
- with potential-free relay contact for call tone forwarding, e.g. to telephone dialler
- call tone received on voltage failure and return
- centre plate for plug-in fixing
- with screw terminals

Suitable for Emergency call set with frame **Order no.** 5200 70 09 **Page** 394

Design Order no. PU
polar white glossy *** 5203 70 09** 1

New



Mains adapter with frame

Operating voltage 24 V
Frequency 50 ... 60 Hz
Input voltage 100 ... 240 V~
Input current max. 180 mA
Output current max. 250 mA
Operating temperature -5 ... +40 °C

For the power supply of the emergency call system components with 24 V DC.

Recommendation: use deep box.

For installation in standard wall boxes according to according to DIN 49073-1

- centre plate for plug-in fixing
- with screw terminals

Suitable for Emergency call set with frame **Order no.** 5200 70 09 **Page** 394

Design Order no. PU
polar white glossy *** 5204 70 09** 1





Centre plate with 2 plug-in openings and imprint, for call unit

For detailed information on relevant articles (including art. no.) of other manufacturers, please see the Berker online catalogue.

- for call unit with 2 diagnostic plug-in contacts
- centre plate for plug-in fixing

Manufacturer product line
Nurse call systems

Ackermann: clino opt 99

Art. No.

73075C
73020G
73021G
73075D

Design

polar white glossy

Order no.

1244 71 09

PU

10



Centre plate with plug-in opening, red button at top

For detailed information on relevant articles (including art. no.) of other manufacturers, please see the Berker online catalogue.

- for call module with call push-button and monitored auxiliary plug-in contact
- for call push-button with plug-in contact
- button with lens and imprint
- centre plate for plug-in fixing

Manufacturer product line
Nurse call systems

Ackermann: clino opt 99

Art. No.

73071E
73071E2
73075A
73073E

Design

polar white glossy

Order no.

1217 70 09

PU

10



Centre plate with 2 plug-in openings, imprint and red button at top

For detailed information on relevant articles (including art. no.) of other manufacturers, please see the Berker online catalogue.

- with imprint
- for call module with call push-button and plug-in contacts
- for call push-button with diagnostic and auxiliary plug-in contact
- button with lens and imprint
- centre plate for plug-in fixing

Manufacturer product line
Nurse call systems

Ackermann: clino opt 99

Art. No.

73071D
73071D2
73075B
73073D

Design

polar white glossy

Order no.

1218 71 09

PU

10



Centre plate with red button at top

For detailed information on relevant articles (including art. no.) of other manufacturers, please see the Berker online catalogue.

- for call module with call push-button
- button with lens and imprint
- centre plate for plug-in fixing

Manufacturer product line
Nurse call systems

Ackermann: clino opt 99

Art. No.

73071F
73071F2
73073F

Design

polar white glossy

Order no.

1216 70 09

PU

10



Centre plate with red button at bottom

For detailed information on relevant articles (including art. no.) of other manufacturers, please see the Berker online catalogue.

- for call push-button
- button with lens and imprint
- centre plate for plug-in fixing

Manufacturer product line
Nurse call systems
Ackermann: clino opt 99

Art. No.
73022A
73022A2

Design

Order no.

PU

polar white glossy

1219 70 09

10



Centre plate with green button

For detailed information on relevant articles (including art. no.) of other manufacturers, please see the Berker online catalogue.

- for shut-off push-button
- button with lens
- centre plate for plug-in fixing

Manufacturer product line
Nurse call systems
Ackermann: clino opt 99

Art. No.
73642C

Design

Order no.

PU

polar white glossy

1251 70 09

10



Centre plate with yellow button

For detailed information on relevant articles (including art. no.) of other manufacturers, please see the Berker online catalogue.

- for shut-off push-button
- button with lens
- centre plate for plug-in fixing

Manufacturer product line
Nurse call systems
Ackermann: clino opt 99

Art. No.
73642D

Design

Order no.

PU

polar white glossy

1252 70 09

10



Centre plate with blue button and imprint

For detailed information on relevant articles (including art. no.) of other manufacturers, please see the Berker online catalogue.

- with imprint
- for call push-button
- button with lens
- centre plate for plug-in fixing

Manufacturer product line
Nurse call systems
Ackermann: clino opt 99

Art. No.
73022A
73022A2

Design

Order no.

PU

polar white glossy

1223 71 09

10



Centre plate with red + green button

For detailed information on relevant articles (including art. no.) of other manufacturers, please see the Berker online catalogue.

- for call push-button and shut-off push-button
- buttons with lens
- centre plate for plug-in fixing

Manufacturer product line
Nurse call systems
Ackermann: clino opt 99

Art. No.
73642B2

Design

Order no.

PU

polar white glossy

1249 70 09

10



Centre plate with green + yellow button

For detailed information on relevant articles (including art. no.) of other manufacturers, please see the Berker online catalogue.

- for shut-off push-button
- buttons with lens
- centre plate for plug-in fixing

Design
polar white glossy

Manufacturer product line Nurse call systems Ackermann: clino opt 99	Art. No. 73642E
Order no.	PU
1253 70 09	10



Centre plate with white + green button

For detailed information on relevant articles (including art. no.) of other manufacturers, please see the Berker online catalogue.

- with imprint "SU-AUS WARTEN"
- buttons with lens
- centre plate for plug-in fixing
- for office unit

Design
polar white glossy

Manufacturer product line Nurse call systems Ackermann: clino opt 99	Art. No. 73642B
Order no.	PU
1299 71 09	10



Centre plate for pneumatic call switch

- Lens



For detailed information on relevant articles (including art. no.) of other manufacturers, please see the Berker online catalogue.

- centre plate for plug-in fixing

Design
polar white glossy

Manufacturer product line Nurse call systems Ackermann: clino opt 90, 99 / clino phon 95 clino opt 99	Art. No. 70006A 70006B 70006C
Order no.	PU
1236 70 09	10



Centre plate for pullcord push-button

- Lens



For detailed information on relevant articles (including art. no.) of other manufacturers, please see the Berker online catalogue.

- for pullcord push-button with pullcord and knob
- centre plate for plug-in fixing

Design
polar white glossy

Manufacturer product line Nurse call systems Ackermann: clino opt 90, 99 / clino phon 95	Art. No. 70045A3 70046A3 70046A
Order no.	PU
1233 70 09	10



Centre plate with imprinted symbol curve for small sound system

For detailed information on relevant articles (including art. no.) of other manufacturers, please see the Berker online catalogue.

- centre plate for plug-in fixing
- for earpiece and volume control

Design
polar white glossy

Manufacturer product line Nurse call systems Ackermann: clino opt 90, 99 / clino phon 95	Art. No. 73120C 73120H
Order no.	PU
1300 71 09	10



Centre plate with imprint "0 - 1 - 2 - 3 - 4 - 5" for small sound system

For detailed information on relevant articles (including art. no.) of other manufacturers, please see the Berker online catalogue.

– centre plate for plug-in fixing

Manufacturer product line
Nurse call systems

Ackermann: clino opt 90, 99 / clino phon 95

Art. No.

73120A

Design

polar white glossy

Order no.

1301 71 09

PU

10

Frames



Marked items are only suitable for splash-protected IP44 flush-mounted installation when used in conjunction with the corresponding sealing set.



Frame

– for vertical and horizontal mounting

i 917

Suitable for optional Sealings IP44

Order no.

Page

page 390

Design

polar white glossy, 1gang

Order no.

1313 70 09

PU

10

polar white glossy, 2gang vertical

1323 70 09

2

polar white glossy, 3gang vertical

1333 70 09

2

polar white glossy, 4gang vertical

1343 70 09

2

polar white glossy, 5gang vertical

1353 70 09

2

polar white glossy, 2gang horizontal

1363 70 09

2

polar white glossy, 3gang horizontal

1373 70 09

2

polar white glossy, 4gang horizontal

1383 70 09

2

polar white glossy, 5gang horizontal

1393 70 09

2



Frame

– for vertical and horizontal mounting

i 917

Suitable for optional Sealings IP44

Order no.

Page

page 390

Design

anthracite matt, lacquered, 1gang

Order no.

1313 70 06

PU

10

anthracite matt, lacquered, 2gang vertical

1323 70 06

10

anthracite matt, lacquered, 3gang vertical

1333 70 06

2

anthracite matt, lacquered, 4gang vertical

1343 70 06

2

anthracite matt, lacquered, 5gang vertical

1353 70 06

2

anthracite matt, lacquered, 2gang horizontal

1363 70 06

10

anthracite matt, lacquered, 3gang horizontal

1373 70 06

2

anthracite matt, lacquered, 4gang horizontal


1383 70 06

2

anthracite matt, lacquered, 5gang horizontal

1393 70 06

2



Frame

Support plate thickness

max. 2 mm

– for vertical and horizontal mounting

i 917

Suitable for optional Sealings IP44

Order no.

Page

page 390

Design

Aluminium, aluminium anodised, 1gang

*** 1313 70 03**

PU

10

Aluminium, aluminium anodised, 2gang vertical

*** 1323 70 03**

2

Aluminium, aluminium anodised, 3gang vertical

*** 1333 70 03**

2

Aluminium, aluminium anodised, 4gang vertical

*** 1343 70 03**

2

Aluminium, aluminium anodised, 5gang vertical

*** 1353 70 03**

2

Aluminium, aluminium anodised, 2gang horizontal

*** 1363 70 03**

2

Aluminium, aluminium anodised, 3gang horizontal

*** 1373 70 03**

2

Aluminium, aluminium anodised, 4gang horizontal

*** 1383 70 03**

2

Aluminium, aluminium anodised, 5gang horizontal

*** 1393 70 03**

2



Frame

i 917

– for vertical and horizontal mounting

Design	Order no.	Page
Stainless steel, metal matt finish, 1gang	1313 70 04	10
Stainless steel, metal matt finish, 2gang vertical	1323 70 04	2
Stainless steel, metal matt finish, 3gang vertical	1333 70 04	2
Stainless steel, metal matt finish, 4gang vertical	1343 70 04	2
Stainless steel, metal matt finish, 5gang vertical	1353 70 04	2
Stainless steel, metal matt finish, 2gang horizontal	1363 70 04	2
Stainless steel, metal matt finish, 3gang horizontal	1373 70 04	2
Stainless steel, metal matt finish, 4gang horizontal	1383 70 04	2
Stainless steel, metal matt finish, 5gang horizontal	1393 70 04	2

Suitable for optional Sealings IP44 **Order no.** **Page**
page 390

Frame with large cut-out



Frame with large cut-out

Not suitable for surface-mounted housing.

– for vertical mounting

Design	Order no.	Page
polar white glossy	1309 70 09	1

Suitable for
Push-button 4gang 7516 43 70 680
Push-button 4gang comfort 7516 47 70 741
Push-button 4gang for light scenes 7516 88 70 743
Push-button 3gang with thermostat 7566 37 70 744
Push-button 5gang with thermostat 7566 57 70 745



Frame with large cut-out

Not suitable for surface-mounted housing.

– for vertical mounting

Design	Order no.	Page
anthracite matt, lacquered	1309 70 06	1

Suitable for
Push-button 4gang 7516 43 75 680
Push-button 4gang comfort 7516 47 75 741
Push-button 4gang for light scenes 7516 88 75 743
Push-button 3gang with thermostat 7566 37 75 744
Push-button 5gang with thermostat 7566 57 75 745



New

Frame with large cut-out

Not suitable for surface-mounted housing.

– for vertical mounting

Design	Order no.	Page
Aluminium, aluminium anodised	* 1309 70 03	1

Suitable for
Push-button 4gang 7516 43 74 680
Push-button 4gang comfort 7516 47 74 741
Push-button 4gang for light scenes 7516 88 74 743
Push-button 3gang with thermostat 7566 37 74 744
Push-button 5gang with thermostat 7566 57 74 745



Frame with large cut-out

Not suitable for surface-mounted housing.


– for vertical mounting

Design	Order no.	Page
Stainless steel, metal matt finish	1309 70 04	1

Suitable for
Push-button 4gang 7516 43 73 680
Push-button 4gang comfort 7516 47 73 741
Push-button 4gang for light scenes 7516 88 73 743
Push-button 3gang with thermostat 7566 37 73 744
Push-button 5gang with thermostat 7566 57 73 745

Surface-mounted housings

New



Housing surface-mounted

Insertion depth

36 mm

- entry at top and bottom possible
- with cable and duct entry
- for mounting on combustible base surface

Flush-mounted devices can be used with the surface-mounted housings for surface-mounted installation.

Suitable for
optional
Entries/connectors

Order no.

Page

page 662

Design

Order no.

PU

polar white glossy, 1gang	1041 70 09	10
polar white glossy, 2gang vertical	1042 70 09	5
polar white glossy, 3gang vertical	1043 70 09	5
polar white glossy, 2gang horizontal	1052 70 09	5
polar white glossy, 3gang horizontal	1053 70 09	5
anthracite matt, lacquered, 1gang	1041 70 06	10
anthracite matt, lacquered, 2gang vertical	1042 70 06	5
anthracite matt, lacquered, 3gang vertical	1043 70 06	5
anthracite matt, lacquered, 2gang horizontal	1052 70 06	5
anthracite matt, lacquered, 3gang horizontal	1053 70 06	5
aluminium matt, lacquered, 1gang	* 1041 70 03	10
aluminium matt, lacquered, 2gang vertical	* 1042 70 03	5
aluminium matt, lacquered, 3gang vertical	* 1043 70 03	5
aluminium matt, lacquered, 2gang horizontal	* 1052 70 03	5
aluminium matt, lacquered, 3gang horizontal	* 1053 70 03	5
stainless steel matt, lacquered, 1gang	1041 70 04	10
stainless steel matt, lacquered, 2gang vertical	1042 70 04	5
stainless steel matt, lacquered, 3gang vertical	1043 70 04	5
stainless steel matt, lacquered, 2gang horizontal	1052 70 04	5
stainless steel matt, lacquered, 3gang horizontal	1053 70 04	5